

(19)  Canadian  
Intellectual Property  
Office

An Agency of  
Industry Canada

Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

(11) **CA 2 337 467**

(13) **A1**

(40) 27.01.2000

(43) 27.01.2000

(12)

(21) 2 337 467

(22) 14.07.1999

(51) Int. Cl. 6: **G06F 17/60**

(85) 15.01.2001

(86) PCT/JP99/03802

(87) WO00/04471

(30) 10/200995 JP 15.07.1998  
10/306057 JP 27.10.1998

(71) **AMADA COMPANY, LIMITED,**  
200, Ishida  
Isehara-shi  
259-1196, KANAGAWA-KEN, XX (JP).


(72) **NANBU, MASANORI (JP).**  
**IWAMOTO, KOHJI (JP).**  
**TAMURA, TOSHIO (JP).**  
**FUKUI, YUKIO (JP).**

(74) **GOWLING LAFLEUR HENDERSON LLP**

(54) APPAREIL D'APPUI DES VENTES  
(54) SALES SUPPORTING APPARATUS


(57)

A sales supporting apparatus comprising a commodity proposal supporting unit (102) provided with an increased profit calculating device (122) for simulating an increased profit created by commodity proposal, a defect phenomenon coping guide device (123) of problem solving type for proposing a commodity, and a commodity catalog output device (121), a commodity database (105) containing pattern/material/commodity data on products classified depending on the patterns of the products, an estimate making unit (103) provided with a product automatic designing device (product parameter setting device) (132) for parametrically designing a product in accordance with the required product specifications by using pattern data, a machining possibility calculating device (133) for simulating the possibility of machining the designed product, and an estimate information output device, and an order acceptance information generating unit (104).

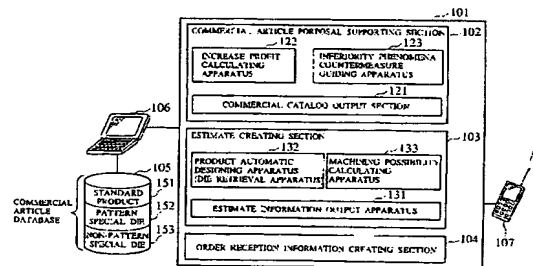



(72) NANBU, MASANORI, JP  
(72) TAMURA, TOSHIO, JP  
(72) IWAMOTO, KOHJI, JP  
(72) FUKUI, YUKIO, JP  
(71) AMADA COMPANY, LIMITED, JP  
(51) Int.Cl.<sup>6</sup> G06F 17/60  
(30) 1998/07/15 (10/200995) JP  
(30) 1998/10/27 (10/306057) JP  
(54) APPAREIL D'APPUI DES VENTES  
(54) SALES SUPPORTING APPARATUS

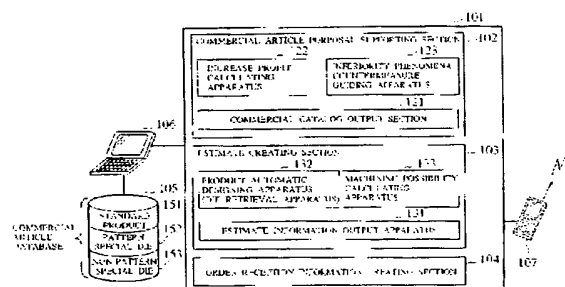

(57) L'invention concerne un appareil d'appui des ventes comprenant une unité (102) d'appui d'offres de produits comprenant un dispositif (122) de calcul d'augmentation de profits destiné à simuler une augmentation de profits provoquée par l'offre de produits; un dispositif (123) guide de réponse à un phénomène de défaut, du type de résolution de problèmes, destiné à proposer un produit; un dispositif (121) de production d'un catalogue de produits; une base de données (105) de produits contenant des données de configuration/ matière/ produit des produits classés en fonction de la configuration des produits; une unité (103) de production d'estimations comprenant un dispositif de conception automatique de produits (dispositif de détermination de paramètres du produit) (102) destiné à concevoir les paramètres d'un produit en fonction des spécifications requises du produit, grâce à des données de configuration; un dispositif (133) de calcul des possibilités d'usinage destiné à simuler la possibilité d'usiner le produit conçu; un dispositif de sortie d'informations d'estimations; et une unité (104) de génération d'informations d'acceptation de commandes.

(57) A sales supporting apparatus comprising a commodity proposal supporting unit (102) provided with an increased profit calculating device (122) for simulating an increased profit created by commodity proposal, a defect phenomenon coping guide device (123) of problem solving type for proposing a commodity, and a commodity catalog output device (121), a commodity database (105) containing pattern/material/commodity data on products classified depending on the patterns of the products, an estimate making unit (103) provided with a product automatic designing device (product parameter setting device) (132) for parametrically designing a product in accordance with the required product specifications by using pattern data, a machining possibility calculating device (133) for simulating the possibility of machining the designed product, and an estimate information output device, and an order acceptance information generating unit (104).



-70-

## ABSTRACT

The present invention is provided with an increase  
profit calculating apparatus (122) which simulates  
5 increase profit according to a commercial article  
proposal, an inferiority phenomena countermeasure  
guiding apparatus (123) which proposes a commercial  
article so as to solve a problem, a commercial article  
proposal supporting section (102) having a commercial  
10 article catalog output apparatus (121), a commercial  
article database (105) having shape/material  
quality/commercial article data of product groups  
classified on the basis of pattern shapes of products,  
a product automatic designing apparatus (product  
15 parameter setting apparatus) (132) which designs a  
product corresponding to a product specification  
required using pattern shape data parametrically, a  
machining possibility calculating apparatus (133) which  
simulates whether or not a designed product is capable  
20 of being machined, an estimate creating section (103)  
having an estimate information output apparatus, and an  
order reception information creating apparatus (104).

-1-

DESCRIPTION

MARKETING SUPPORTING SYSTEM

5 Technical Field

The present invention relates to a marketing supporting system. In particular, to a technical field for performing an efficient product proposal, and for implementing instantaneous answer of estimation to  
10 various product requirements and order reception input in a marketing place.

Background Art

Conventionally, marketing of a product such as a  
15 die for machining is performed through marketing activities in which a sales person visits a working factory or the like to conduct business activity, which is so-called door-to-door selling style.

In the door-to-door selling, when such a product  
20 as a die is proposed to a customer, a sales person merely selects a product(s) from many products through paper catalogs to explain the product(s) therethrough.

Also, when a die required by a customer is a die with a special shape which is not a standard die, the  
25 sales person brings a die specification drawn on such a sheet as a paper which is required by the customer back to a design department of his/her company. In this design department, design and check of drawings (verification about whether or not the special die can be manufactured)  
30 are conducted and the result is notified to the sales

-2-

person. The sales person prepares an estimate for the die on the basis of the result and visits the customer again to present the estimate and receive an order of the product. The information about this order reception  
5 is input into a database in a head office of the company to issue an instruction to a manufacturing department after he/she comes back to his/her sales station or the like.

In such a process, however, there is a drawback that  
10 a product(s) cannot be presented to a customer(s) efficiently. Also, there is another drawback that, when a sales person is asked by a customer, he/she cannot answer the question efficiently.

Furthermore, when a die with a special shape  
15 (hereinafter, called special die) is ordered, such an order is brought back to the company and a design and check of drawings are conducted in the design department. For this reason, there is still another drawback that an estimate including an appointed data of delivery cannot  
20 be presented to the customer immediately, which results in that a long time is required from an order reception to delivery.

Simultaneously, since a sales person brings back a specification of a special die based upon a handwriting  
25 indication, an oral indication or the like to give a person(s) in the design department the specification, there often occurs an error of an original instruction of a customer or misunderstanding of the sales person. For this reason, there occurs claims from customers  
30 because manufactured products do not meet

-3-

specifications.

#### Disclosure of Invention

The present invention has been made in order to solve  
5 the above problems in the conventional art.

An object of the present invention is to present  
a product to a customer efficiently and in a various  
manner.

Also, another object of the present invention is  
10 to answer a customer's question to a product  
instantaneously and allow sales or marketing activities  
in a uniform level.

Furthermore, still another object of the present  
invention is to determine whether a standard product  
15 requested can be manufactured and whether or not a special  
shaped product requested can be machined in a door-to-door  
selling place.

Moreover, another object of the present invention  
is to allow instantaneous estimation and order reception  
20 input in a door-to-door selling place.

The summary of a marketing supporting system  
according to the present invention for solving the above  
problems is as follows:

One feature of the present invention is to provide  
25 an increase profit calculating apparatus which can grasp  
cost consumption easily and can grasp cost reduction  
easily and rapidly.

The increase profit calculating apparatus  
comprises:

30 first die screen creating means which creates a first

-4-

die apparatus screen (205) for displaying a first die apparatus; and

increase profit screen creating means which is operated in response to a click operation of a specific mark on the first die apparatus screen and which creates an increase profit screen (207) for displaying increase profit occurring by employing the first die apparatus instead of a second die apparatus corresponding to the first die apparatus.

10 The increase profit screen comprises:

question item fields (207a - 207d) on which a plurality of questions about operations of the first die apparatus and the second die apparatus and relating to costs following the operations are presented;

15 a field (207i) on which a first total cost is displayed within a predetermined time period due to use of the first die apparatus;

a field (207j) on which a second total cost is displayed within the predetermined time period due to use of the second die apparatus; and

20 a field (207k) on which an increase profit field for displaying increase profit obtained by employing the first die apparatus is displayed.

Then, the increase profit calculating apparatus is provided with calculating means which calculates the first and second costs and the increase profit according to an answer to the questions from an operator.

According to the above configuration, cost consumption can be grasped easily and cost reduction can be grasped easily and rapidly.

-5-

It is preferable that the question items in the increase profit screen (207) includes the number of die apparatus exchanges per one day, a time required for die apparatus exchange per one time, personnel expenses per  
5 predetermined time, and the number of working days within a predetermined term.

A second feature of the present invention is to provide a inferiority phenomenon countermeasure guiding apparatus which allows search and selection of an optimal  
10 countermeasure to a inferiority phenomenon. The inferiority phenomenon countermeasure guiding apparatus comprises:

inferiority phenomenon screen creating means which creates a inferiority phenomenon screen (209) for  
15 displaying a plurality of inferiority phenomena in predetermined kinds of workings such as punching or the like; and

inferiority phenomenon cause screen creating means which is actuated by clicking a inferiority phenomenon  
20 display portion in the inferiority phenomenon screen and which creates a inferiority phenomenon cause screen (211) for displaying a list of causes (such as fatigue of a spring, a clearance unsuitableness and the like) causing the inferiority phenomenon.

25 It is preferable that the inferiority phenomenon countermeasure guiding apparatus further comprises avoidance information screen creating means which is actuated by clicking a portion displaying one cause in the list of causes and which creates an avoidance  
30 information screen (213) for displaying information for



-6-

avoiding the one cause.

It is preferable that the inferiority phenomenon countermeasure guiding apparatus comprises specific die screen creating means which is actuated by clicking a  
5 predetermined portion of the inferiority phenomenon cause screen (211) or a predetermined portion of the avoidance information screen (213) and which creates a specific die screen (217) for displaying a specific die for avoiding the inferiority phenomenon.

10 According to these structures, it is made possible to search for and select an optimal countermeasure to an inferiority phenomenon easily.

Another feature of the present invention is to provide a inferiority phenomenon countermeasure guiding  
15 apparatus for a die for bending machining. This apparatus comprises cause/countermeasure display screen creating means which creates a cause/countermeasure screen (223) for displaying a cause of a inferiority phenomenon in a predetermined kind of workpiece such as  
20 bending workpiece or the like and a plurality of countermeasures of a first type for avoiding the inferiority phenomenon due to the cause; and

countermeasure explanation screen creating means which is actuated by clicking a portion displaying one  
25 countermeasure in the cause/countermeasure screen and which creates a countermeasure explanation screen (225) for explaining specific contents of the countermeasure through a drawing(s) and a character(s).

This inferiority phenomenon countermeasure guiding  
30 apparatus further comprises specific die screen creating

-7-

means which is actuated by clicking a predetermined portion of the cause/countermeasure screen or the countermeasure explanation screen and which creates a specific bending die screen (227) for displaying a specific bending die for avoiding the inferiority phenomenon due to the cause.

According to the above structure, it is made possible to select an optimal bending die rapidly when an inferiority phenomenon has occurred in a bending machining.

Another feature of the present invention is to provide a question answer accumulating apparatus comprising means for inputting a question;

means for inputting an answer to the question; and

means for storing the question and the answer in a state mutually correlated with each other.

According to this apparatus, machine operators' questions about dies or the like and answers thereto are accumulated so that knowledge of practically skilled persons responding to the answers are accumulated in a state correlated with the answers and it is possible to respond to a question which will occur in the future easily.

Another feature of the present invention can provide a die retrieval apparatus comprising input screen creating means which creates input screens (231, 233) provided with a field in which a plurality of shapes of a die is input, a field in which the kind of a machine used with the die is input, a field in which a structure of the die is input, and a field in which material for

-8-

the die is input; and standard die screen creating means which is actuated by inputting data pieces into the respective fields of the input screens and which, when a die meeting the respective data pieces exists, creates  
5 a standard die screen (235) for displaying a sectional configuration of the die, a parts list name, unit prices of respective parts, and, when no die meeting the respective data pieces exists, creates an error display.

According to this apparatus, it is made possible  
10 to select a die rapidly by inputting intuitive data pieces such as a die adaptive machine, a die shape or the like when a die is specified by combination of complicated symbols and when it is difficult to describe the combination of the symbols.

15 Another feature of the present invention is to provide a product automatic designing apparatus (product parameters setting apparatus) which is made possible to perform automatic designing of a die product at a door-to-door selling place or the like easily in answer  
20 to even a requirement for a product except for standard products. This product automatic designing apparatus (product parameters setting apparatus) can design a product shape on the basis of shape/material data of a group of products which have been classified and  
25 registered based upon the shape patterns of products in response to an estimate requirement for not only standard products on a product catalog but also specially shaped die products which cannot be substituted for standard products. That is, a die product can be designed  
30 parametrically by a simple operation of inputting

-9-

predetermined size data regarding a selected shape pattern.

The structure for implementing this feature is, for example, a product automatic designing apparatus (product parameters setting apparatus) which comprises  
5 (product parameters setting apparatus) which comprises die shape selection screen creating means which creates shape pattern selection screens (237, 239) used for selection of a shape about a die to be designed, and

die dimension parameter input screen creating means  
10 which is actuated according to selection and input of a specific shape pattern on the die shape selection screen and which creates a die dimension parameter input screen (241) which allows input of dimension parameters of predetermined portions about the selected die shape,  
15 wherein

the shape pattern selection screen (237) includes at least a field which allows selection of the kind of a die to be designed and a field which allows selection of a shape pattern regarding the die to be designed;

20 the die dimension parameter input screen (241) includes at least a shape parameter input field (241b) which displays a dimension parameter input portion required to specify the selected die shape pattern and the shape of the die to be designed and a dimension  
25 parameter input field (241c) in which a dimension parameter of the input portion is input; and

the product automatic designing apparatus (product parameter designing apparatus) comprises design means which performs a design according to a correspondence  
30 relationship between die shapes which have been

-10-

classified on the basis of die shape patterns and stored previously and dimension parameter groups required to specify the shape of the die.

Incidentally, it is preferable that the previously  
5 stored shape pattern is stored so as to correspond to a plurality of dimension parameter groups required to specify the die shape belonging to the shape pattern, and

the dimension input screen is further provided with  
10 a dimension input pattern selection field which allows selection of one dimension parameter group from the plurality of dimension parameter groups.

Also, it is preferable that the shape pattern selection screen further comprises adapted shape display  
15 field which displays one or a plurality of shape sub-patterns contained in shape variation included in the selected shape pattern.

According to this structure, a sales person can design a special shape die parametrically at a  
20 door-to-door selling place without such a consciousness that this die is a special shape die. Accordingly, he/she can design the special shape die at the door-to-door selling place without bringing a customer's requirement back to the design department.

25 Another feature of the present invention is to provide a machining possibility calculating apparatus which allows verification of possibility of real machining about the designed die product rapidly and easily.

30 This machining possibility calculating apparatus

-11-

verifies whether or not a desired machining can be performed on the designed die product on the basis of shape data/material data about the designed product, material quality data of material to be machined, and  
5 the like. Also, the apparatus checks consistency among input dimension parameters.

The structure realizing this feature comprises, for example, die data input means which inputs die data including shape data of a predetermined die specified  
10 by the shape pattern and the dimension pattern of a die to be designed, structure data of the die and material quality data;

material data input means which inputs material data including the plate thickness and material quality of  
15 a material to be machined which is machined by the die; and

machining verification means which verifies whether or not the die to be designed can be machined on the basis of the input die data and material data.

20 Incidentally, it is preferable that the machining verification means performs the verification by comparing the resisting pressure of the die which has been obtained according to a strength calculation from the die data and the machining request pressure required  
25 for machining performed by the die which has been obtained from the material data with each other.

Furthermore, it is preferable that the machining verification means performs the verification by checking the consistency among the input dimension data pieces.

30 According to this structure, since suitability

-12-

about numerical values of the dimension parameters is checked, a determination about whether or not it is possible to manufacture the designed product actually, namely it is possible to provide the same, can be made  
5 instantaneously during a marketing activity. Accordingly, the number of work steps such as preparation of drawing checking, redesigning or the like is reduced.

Another feature of the present invention is to provide an automatic estimate creating apparatus which  
10 provides an estimate about the designed and verified product instantaneously at a marketing place.

The automatic estimate creating apparatus which creates an estimate including data necessary to create an estimate of not only price data of a product which  
15 has been designed/verified but also price reduction limitation and delivery time limit data.

The structure realizing this feature comprises input means which inputs product data of a product for which an estimate is to be prepared, the number of products,  
20 and customer data;

estimate data storage means in which delivery time limit data corresponding to the product and data about price reduction rate to a fixed price of a die product is stored; and

25 detailed estimate information creating means which outputs detailed estimate information on the basis of the input data,

wherein the detailed estimate information output includes deliverable data determined according to the  
30 delivery time limit data and an amount obtained by

-13-

discount according to the discount rate data.

Incidentally, it is preferable that the product for which the estimate is to be created can be input by specifying the shape and/or material quality of the product.

According to the structure, since product data is displayed in a interlocking manner with design data specified from the shape or the like, it becomes unnecessary to perform complicated search/re-input from a large number of product codes, catalog numbers or the like. Also, it becomes possible to create an estimate including all information necessary for estimate rapidly and easily. Accordingly, an estimate is created instantly at a marketing place so that an early sales commitment can be obtained.

Another feature of the present invention is to provide an order reception information outputting apparatus which allows an instant order reception regarding the estimated product to issue a production instruction.

This order reception information outputting apparatus can secure an order reception to issue a manufacture instruction while presenting the contents of an estimate to a customer at a marketing place, and can make a communication with manufacture schedule information a remote place to output a deliverable data according to the manufacture schedule at this time.

The structure realizing this feature comprises, for example, order reception information screen creating means which displays an order reception information



-14-

screen of a product ordered at a marketing place; and  
order reception information transmitting means  
which is actuated by clicking a specific mark on the order  
reception information screen and which transmits the  
5 order reception information to a manufacture end.

Incidentally, in addition, it is preferable that  
the order reception information outputting apparatus  
further comprises delivery data update displaying means  
which displays change in delivery data of a product on  
10 the order reception information screen on the basis of  
data received in response to transmission of the order  
reception information.

According to this structure, it is possible to secure  
an order reception rapidly and start manufacture at an  
15 early time. Accordingly, an early delivery of a product  
is made possible.

Incidentally, in the specification of the present  
application, the term "sale object" includes products  
such as a die apparatus, a machine part, a blade of a  
20 machine, a machine or the like, and services such as  
maintenance of these products.

#### Brief Description of Drawings

Fig.1 is a block diagram showing a configuration  
25 of a supporting apparatus of the present invention;

Fig.2 is an explanatory diagram of a table of  
contents screen displayed on a display screen of the  
supporting apparatus of the present invention;

Fig.3 is one example of a product catalog screen  
30 displayed on the display apparatus;

-15-

Fig.4 is one example of an increase profit screen displaying increase profit displayed on the display screen;

Fig.5 is one example of an inferiority phenomenon  
5 screen displayed on the displaying apparatus;

Fig.6 is one example of a inferiority phenomenon cause screen displaying a list of causes generating an inferiority phenomenon shown in Fig.5;

Fig.7 is one example of an avoidance information  
10 screen displaying information for avoiding inferiority causes shown in Fig.6;

Fig.8 is one example of an information screen displaying another method for solving the cause shown in Fig.7;

Fig.9 is an explanatory screen for explaining a  
15 special die for avoiding the inferiority phenomenon shown in Fig.6;

Fig.10 is one example of a clearance diagnostic test screen serving as a reference value screen displayed on  
20 the displaying apparatus by clicking a predetermined portion on the screen shown in Fig.6 in a case that the cause in Fig.6 is a clearance unsuitableness;

Fig.11 is an accompanying disadvantage and the like display screen which is displayed by clicking a  
25 predetermined portion on the screen shown in Fig.10, for displaying an accompanying inferiority phenomenon or disadvantage due to the clearance unsuitableness;

Fig.12 is a cause/countermeasure screen which is displayed by clicking a display portion of the characters  
30 "BENDING" on the screen in Fig.2, for displaying a cause

-16-

of an inferiority phenomenon in a bending machining and a plurality of countermeasures for avoiding the inferiority phenomenon;

Fig.13 is a screen for explaining the details of a predetermined countermeasure in Fig.12;

Fig.14 is a bending die display screen (special bending die screen) which is displayed by clicking a predetermined portion on the screen in Fig.12 or Fig.13, for explaining a countermeasure bending die (or novel bending die);

Fig.15 is a special bending die detail explanatory screen which is displayed by clicking a predetermined portion on the screen in Fig.14, for explaining the details of suitable material for the countermeasure bending die (novel bending die), a suitable apparatus, functions and the like;

Fig.16 is an explanatory diagram of a die list screen showing a list of punching dies/bending dies and a die data input screen in which data of standard dies is input;

Fig.17 is an explanatory diagram of a second die data input screen for selecting a standard die in punching dies;

Fig.18 is an explanatory diagram of a second die data input screen for selecting a standard die in punching dies;

Fig.19 is an explanatory diagram of a second die data input screen for selecting a standard die in punching dies;

Fig.20 is an explanatory diagram of a parts list screen which is displayed according to a standard die

-17-

selection in punching dies;

Fig.21 is an explanatory diagram of a punching die selection screen displaying a list of punching dies and shape patterns;

5 Fig.22 is an explanatory diagram of a punching die selection screen displayed when a predetermined shape pattern is selected in Fig.20;

Fig.23 is an explanatory diagram of a dimension parameter input screen displayed in response to selection  
10 of the shape pattern of the punching die in Fig.20 and Fig.21;

Fig.24 is an explanatory diagram of a dimension parameter input screen displayed when another dimension parameter group is selected in Fig.22;

15 Fig.25 is an explanatory diagram of a screen showing the result of machining possibility simulation for a punching die manufactured according to input dimension parameters, material and material quality in Fig.23;

Fig.26 is an explanatory diagram of a parts list  
20 screen displayed in response to a special die selection in punching dies;

Fig.27 is an explanatory diagram of a punch die selection screen displaying a list of bending dies and shape patterns;

25 Fig.28 is an explanatory diagram of a dimension parameter input screen displayed in response to shape pattern selection for a bending die in Fig.26;

Fig.29 is an explanatory diagram of a special item input screen displayed in response to special item input  
30 selection in Fig.27;

-18-

Fig.30 is an explanatory diagram of a screen showing the result of machining possibility simulation for a bending die manufactured according to input dimension parameters, material and material quality;

5 Fig.31 is an explanatory diagram of a screen showing the result of machining possibility simulation of a bending die manufactured according to dimension parameters of different values, material and material quality in Fig.29;

10 Fig.32 is an explanatory diagram of an estimate detail information input screen displayed in response to a die product selection on the parts list screen;

Fig.33 is an explanatory diagram of an estimate detail information input screen displayed in response  
15 to another die product selection on the parts list screen;

Fig.34 is an explanatory diagram of an example of an estimate output in response to selection of estimate issue on the screen in Fig.31;

Fig.35 is an explanatory diagram of an example of  
20 a main menu on a portable terminal for sales person according to an embodiment of the present invention;

Fig.36 is an explanatory diagram of a screen for selecting a workpiece shape on the basis of a customer's drawings;

25 Fig.37 is an explanatory diagram of a screen in which workpiece dimensions are input;

Fig.38 is an explanatory diagram of a screen for selecting a die according to workpiece shape/workpiece dimensions;

30 Fig.39 is an explanatory diagram of a screen

-19-

indicating additional machining to a selected die on the screen in Fig.38;

Fig.40 is an explanatory diagram of a screen displaying resisting pressure calculation of the die which has been subjected to the additional machining specified in Fig.39;

Fig.41 is an explanatory diagram of a screen displaying a price of the die including the additional machining specified in Fig.39;

Fig.42 is an explanatory diagram of a screen indicating another additional machining to the selected die; and

Fig.43 is an explanatory diagram of a screen displaying resisting pressure calculation of the die which has been subjected to the additional machining specified in Fig.42.

#### Best Mode for Carrying out the Invention

An embodiment of the present invention will be explained below with reference to the drawings.

Referring to Fig.1, an embodiment of a marketing supporting apparatus of the present invention comprises a database 105 in which data is stored, a display apparatus 106, and a communication apparatus 107 performing communication of data with an external apparatus. A marketing supporting apparatus 101 comprises a product proposal supporting section 102, an estimate creating section 103, and an order reception information creating apparatus 104. Then, the product proposal supporting section 102 comprises an increase

-20-

profit calculation apparatus 122, an inferiority phenomenon countermeasure guiding apparatus 123, and a product catalog output apparatus 121. Also, the estimate creating section 103 comprises a product automatic  
5 designing apparatus (product parameter setting apparatus) (die retrieval apparatus) 132, a machining possibility calculation apparatus 133, and an estimate information output apparatus 131. Also, the product database 105 comprises a standard product database 105  
10 in which data about standard dies is stored, a pattern special die database 152 in which special dies patterned are stored, and a non-patterned special die database 153 in which extremely special dies which cannot be patterned are stored.

15 For the marketing supporting apparatus 101 in the present embodiment, a program performing processing explained below is created and a computer system which can execute this processing by loading this created program is used. This computer system includes a  
20 so-called general purpose machine, a workstation, a PC, a NC (Network Computer) or the like. In the present invention, however, it is preferable that a portable type PC which can be carried to a marketing place. The hardware configuration of the computer system used in the present  
25 embodiment is provided with a CPU for performing various processings, a memory such as a program memory/data memory or the like, an external storage apparatus such as a FD, a CD or the like, and an output apparatus such as a display unit or the like. The processings explained below can  
30 be performed as off-line processings in a single PC

-21-

without connection to a computer in a head office or a branch office except for processings which are performed in the order reception information creating apparatus 104.

5       Incidentally, the program for implementing the marketing supporting apparatus of the present embodiment is can be saved in one of various recording media such as a magnetic disk, an optical disk, a memory card and the like. The present embodiment can be implemented by  
10       reading recording medium into the program memory to execute the program.

Next, processing contents of the marketing supporting apparatus according to the embodiment of the present invention will be explained.

15       When the supporting apparatus is actuated, a contents table screen 200 shown in Fig.2 is displayed on the display apparatus 106 (hereinafter, a case that the term "displayed" is merely used means that "display" is performed on the display apparatus 106 when there is  
20       no special explanation). Displayed on this contents table screen are a product introduction field 201, a various phenomena countermeasure (namely, inferiority phenomena countermeasure) field 203, and a question answer field 204. Incidentally, sub-fields of a punching  
25       field 203a and a bending (curving) field 203b are displayed on the various phenomena countermeasure field 203.

In the above, for example, when a display portion of the product introduction field 201 is clicked, the  
30       product catalog output apparatus 121 is actuated, and



-22-

a product introduction screen 205 (a first die apparatus screen) as shown in Fig.3 is displayed. In Fig.3, as one example, triple holders holding three dies are displayed. According to this holder, once the holder  
5 is set on a punch press, punching machining of three kinds corresponding to the three dies mounted on the holder can be performed without exchanging dies.

According to the supporting apparatus of this invention, increase profit obtained by using the triple  
10 holder can easily be calculated. That is, when a predetermined portion on the display screen 205 in Fig.3 is clicked, an increase profit screen 207 displayed in Fig.4 is displayed. The increase profit screen 207 displays increase profit occurring by employing a triple  
15 holder instead of a single holder holding only one die. That is, displayed on this screen 207 are a question 207a for asking the number of holder exchanges per day, a question 207b for asking an exchanging time required per one time, a question 207c for asking labor cost of a worker  
20 per one hour, and a question 207 for asking working days per one month. Answer fields 207e, 207f, 207g and 207h in which an operator inputs answers to these questions are provided. That is, the field 207e in which an answer to the question 207a is input, the field 207f in which  
25 an answer to the question 207b is input, the field 207g in which an answer to the question 207c is input, and the field 207h in which an answer to the question 207d are provided. Then, when an operator writes answers in these fields, a labor cost (one month) required for holder  
30 exchanges occurring when a single holder is used is

-23-

displayed on a field 207i, a labor cost per one month corresponding to a case of use of a triple holder is displayed on a field 207j, and increase profit per one month occurring when a triple holder is used instead of  
5 a single holder is displayed on a field 207k.

According to the invention, regarding to the triple holder (the first die apparatus), increase of profit obtained by the use of the triple holder instead of the single holder is calculated easily. In other words, the  
10 cost waste made by the use of the single holder (the second die apparatus) is grasped easily, and so is the cost reduction by the use of the triple holder (the first die apparatus).

Next, when a field of the punching 203a in the various  
15 phenomena countermeasures 203 is clicked on the contents table screen 200 shown in Fig.2, the various phenomena countermeasure guiding apparatus (inferiority phenomena countermeasure guiding apparatus) 123 is actuated and an inferiority phenomena screen 209 shown in Fig.5 is  
20 displayed on the display apparatus 106. Images 209a, 209b, 209c and the like displaying various inferiority phenomena in a punching machining are displayed on the screen 209. Then, for example, when a display portion of a stripping error 209b is clicked on the screen 209,  
25 the inferiority phenomena cause screen creating means is actuated, and an inferiority phenomena cause screen 211 displaying a plurality of causes generating the stripping error (inferiority phenomenon) is displayed on the display apparatus 106 (Fig.6). Incidentally, the  
30 stripping error means that a workpiece bites a tip portion

-24-

of a punch which has performed punching machining and a portion of the workpiece which has been subjected to the punching machining is brought up according to elevation of the tip portion of the punch.

5       As shown in Fig.6, punch blade tip melt adhesion 211a, lubricant unsuitableness 221b, clearance unsuitableness 211c, wear 211d, spring fatigue 211e and the like which may be causes of the stripping error are displayed on the screen 211. Also, a simulation  
10       displaying a situation where the stripping error occurs as an animation together with the plurality of causes 211a to 211e is displayed on a simulation display section 211g.

      Accordingly, a drawback which has occurred in the  
15       material to be machined can easily be grasped and understood as a stripping error in punching machining by referring to this simulation screen. Also, since the causes of the stripping error are listed up on the screen 211, the cause of the inferiority phenomenon can easily  
20       be grasped and understood by referring to the list and a countermeasure to the inferiority phenomenon can be proposed.

      An avoidance information screen 213 displaying a method (information) for avoiding this cause is displayed  
25       by clicking a display portion of one cause in the cause list (Fig. 7). In this embodiment, for example, when a display portion 211e of the spring fatigue (cause) is clicked, a spring fatigue avoidance information screen 213 shown in Fig.7 is displayed. For example, such  
30       information that it is necessary to exchange springs

-25-

periodically in order to avoid the spring fatigue is displayed on this screen 213. In detail, information 213a that it is necessary to perform exchange for each two years when pressure of 1.2 tons or less is applied  
5 (corresponding to 1,000,000 hits), it is necessary to perform exchange for each year when pressure of 1.2 tons to 3.2 tons is applied (corresponding to 500,000 hits), and it is necessary to perform exchange for each half  
10 a year when pressure of 3.2 tons to 6 tons is applied (corresponding to 200,000 hits) is displayed as criteria for exchange.

Therefore, according to the apparatus of the present invention and the above screens, when a stripping error occurs and its cause is considered to be spring fatigue,  
15 the necessity that spring exchange is performed periodically at predetermined intervals in order to avoid such an error is understood so that efficiency can be improved in machining.

When a predetermined portion is clicked on the screen 20 213 shown in Fig. 7, a screen 215 shown in Fig. 8 is displayed. A countermeasure performed on a current die to reduce the number of exchanges of the die in possible range and avoid the spring fatigue is displayed on this screen 215. In this embodiment, for example, information 215a showing  
25 necessities of increase in die size and increase in spring force is displayed. Also, as problems occurring due to use of such a die, information 215b about increase in cost of a die, necessity of change of the program, or lack in the number of turret stations is also displayed  
30 on the screen 215.

-26-

Accordingly, by referring to these information items 215a, 215b, it can easily be understood that the increase in size of the die and the increase in spring force can be applied to avoid the spring fatigue which is the problem but such problems as increase in cost of a die, necessity of program change, lack in the number of stations and the like occur.

Then, when a countermeasure product 211f or 211h shown in Fig.6, or a field 213b of Fig.7 or a field 215c of Fig.8 is clicked, a screen 217 shown in Fig.9 is displayed on the display apparatus 106. In this screen 217, information 217 about a gas spring is displayed as a die for avoiding the stripping error. In particular, a sectional configuration of the gas spring is displayed at a portion indicated by reference numeral 217b. This gas spring uses a apparatus where gas is sealed instead of a mechanical spring in order to urge a punch body 217e and a punch head 217f of a punch die upward against a punch guide 217b.

Displayed on the screen 217 is also a graph 217c showing that the pressure of the gas spring is larger than that of the mechanical spring in a region where a stripping error is easy to occur. Furthermore, displayed on the screen 217 is information 217d about preferable functions or effects obtained by a punch die of the gas spring.

Therefore, according to this screen 217, the structure of the gas spring type die, the advantages of the gas spring compared with a standard coil spring and the preferable functions of the gas spring can be

-27-

understood and grasped at once. Also, a determination can be made about whether or not a gas spring type die should be employed as a countermeasure to the current inferiority phenomenon in punching machining easily and rapidly while profitability is taken in consideration.

Incidentally, when an explanation field 217e is clicked on the screen 217, an animation where the punch body 217e and the punch head 217f are moved up and down relative to the punch guide 217b is displayed in a simulation manner on the field 217d, and sound for explaining the structure and operation functions of the gas spring die is output from a predetermined sound apparatus. Thereby, the structure, the functions and the operations of the gas spring can be understood more easily.

On the screen 211 shown in Fig. 6, when unsuitableness of an clearance size formed between an inner diameter of a die and an outer diameter of a punch chip is considered as a cause of a stripping error, a display portion 211 of clearance unsuitableness is clicked on the screen 211. Thereby, reference value screen creating means is actuated so that a clearance diagnosis test screen 219 is displayed as a screen displaying a reference value (Fig. 10). In this embodiment, a question field 219a for asking machined material to be used for machining, a question field 219b for asking the thickness of the material, and a question field 219c for asking a clearance in the machining are provided on the screen 219. When an operator inserts answers to these questions, a determination is made about whether the clearance value

-28-

219f is too small, suitable or too large in view of the values 219d and 219e of the machined material quality and the thickness of the machined material. On this screen 219, it is displayed in a reference value display field 219g that a standard value of a clearance to the machined material quality 219d and the thickness 219e is 0.3 mm, and a display 219h showing that a value 219f of the clearance is small as compared with the reference value is displayed.

10       Next, when a display portion 219i relating to the display 210h is clicked, a screen 221 is displayed on the display apparatus (Fig.11). This screen 221 is an accompanying disadvantage display screen 221 display other inferiority phenomena or disadvantages which may occur when the clearance is below the suitable clearance. In detail, description 221d is displayed on the screen 221 that, when the current clearance is smaller than the suitable clearance, the secondary shear occurs so that a large load applied to a punch and die. Also, a description 221a is displayed that according to advance of wear in a punch and a die, cost in consumption increases and the working ratio is lowered. Furthermore, a description 221b is displayed that product inferiority occurs, loss in material occurs and loss in machining charge occurs. Also, a description 221c "twice or more decrease in cost can be realized by selecting a die for each material/plate thickness" is displayed.

Accordingly, referring to the screen 221, it is understood that, when the current clearance is smaller that a suitable clearance, various disadvantages or

-29-

inferiority phenomena occur, and it is understood that the double or more decrease in cost can be achieved by using dies having different hole diameters for respective materials or plate thicknesses. Thereby, it is understood that it is important to set a clearance to a suitable value in order to achieve rapidness of machining or accurate machining and for attaining decrease in cost. As a result, by referring to this, a suitable clearance can be achieved, accuracy in machining can be improved, working ratio can be increased, and decrease in cost can be attained.

Incidentally, displayed on the screen 219 (Fig.10) is information 219j that, when the clearance is larger than a suitable clearance, "deformation of material becomes large prior to start of cutting, which results in the same as a case that the die has been consumed". Thereby, it is understood that a drawback occurs even when the clearance is too large, and importance of selecting a clearance suitably is understood.

Therefore, by referring to these screens, a clearance can be selected suitably, and accuracy in machining, rapidness in machining or decrease in cost can be achieved.

Referring to Fig.2 again, when a bending field 203b for various phenomena countermeasure is selected, a screen 223 shown in Fig.12 is displayed in the display apparatus. This screen 223 is a cause/countermeasure screen showing bending flaw occurrence of various inferiority phenomena and a plurality of countermeasures (a first kind of countermeasures) for avoiding the bending



-30-

flaw occurrence. Incidentally, the bending flaw means a flaw occurring at a machined portion of a material indicated by each arrow of an explanation diagram 223a on the screen 223. As the countermeasures to the bending  
5 flaw, application of oil to a shoulder portion of a die (223b), attachment of a tape to a die (223c), application of clamping state bending (223d), application of vinyl-coating (223e) and the like are displayed on the screen 223. Incidentally, regarding these  
10 countermeasures, their features and directions corresponding to these countermeasures are also displayed, respectively (223f, 223g). Also, besides the specific countermeasures, general countermeasures for avoiding bending flaw occurrence are displayed in a field  
15 223h on the screen 223. Especially, as the third countermeasure of the general countermeasures, setting of proper V width to required tons is displayed.

Accordingly, by referring to these displays, it can be understood easily that when bending flaw occurs, what  
20 is considered as its cause, or which countermeasures can be employed to the cause (general countermeasures and specific countermeasures). Therefore, one or a plurality of these countermeasures can be employed to minimize bending flaw occurrence in a bending machining.

25 For example, when a display portion 223b of countermeasure 1 is clicked, a screen 225 shown in Fig.13 is displayed. Displayed on this screen 225 is a specific operation "apply oil to a shoulder portion of a die" through a drawing (225a).

30 Accordingly, by referring to a display 225a on the

-31-

screen 225, a specific content or specific operation of each countermeasure 1 can easily be understood through a drawing or characters.

Next, when a countermeasure product display portion  
5 223i or 225b on the screen 223 or the screen 225 is clicked, a screen 227 is displayed on the display apparatus (Fig.14). This screen 227 is a specific bending die screen showing that a new type die named "Selatic Die"  
10 occurring. Formed on the screen 227 is a display 227b that a suitable material capable of using the Selatic Die is stainless steel, iron or the like as well as a display 227a of features of the Selatic Die.

When a display 227c displaying a shape of the Selatic  
15 Die through a drawing is clicked on the screen 227, a screen 229 is displayed on the display apparatus (Fig.15). More specific functions, suitable materials or suitable apparatus are explained on the screen 229 in detail, as shown in Fig.15.

20 Accordingly, by referring to the screens 227 and 229, a new die for bending flaw countermeasure can be evaluated easily and rapidly, so that the problem about the bending flaw can be rapidly solved.

Referring to Fig.2 again, when the display portion  
25 205 of Question and Answer is clicked on the screen 200, the past questions and the answers thereto are displayed in a mutually related state. By referring to these, an operator can refer to the past questions relating to the operations, functions, movements of the die and, when  
30 there is any questions relating to the current problem,

-32-

he/she selects these questions so that he/she can easily obtain the answer about the current outstanding problem of the die by referring to the answers displayed relating to the respective questions. Then, when the question about the currently relating problem cannot be obtained from a list of the questions accumulated in the past, these questions are input by the question input means. Thereby, these questions are transmitted to a master supporting apparatus for supporting apparatus via a proper communication means 107, and a practically skilled answerer who operates this master supporting apparatus inputs answers to these questions into the master supporting apparatus. Thereby, these answers are transmitted from the master supporting apparatus to the supporting apparatus of the present invention, and they are stored a proper storage apparatus in this supporting apparatus. Accordingly, the current outstanding problem can be solved by utilizing this answer. Also, by storing the answer from this master supporting apparatus in a state relating to the question, an operator can refer to this question and this answer when a question similar thereto will occur, so that he/she can solve a problem which will occur in the future easily and rapidly. Incidentally, regarding a new question, when an operator operating this supporting apparatus can answer the question, the operator inputs the answer into the supporting apparatus at the place. Thereby, the answer is stored in the storage means of the supporting apparatus in a state where it is related to the question.

When a die required by a customer is a standard one,

-33-

the supporting apparatus of the present invention also serves as a die retrieval apparatus for selecting the required die easily and rapidly. That is, when a die is specified with a complicated combinations of symbols and it is difficult to remember the combination of symbols, the die retrieval apparatus can select a standard die easily and rapidly by inputting intuitive data such as a machine suitable for use of a die, the shape of a die or the like.

10        This die retrieval apparatus is provided with input screen creating means which creates input screens 231, 233 which includes a field in which a plurality of shapes of a die is input, a field in which the kind of a machine using a die is input, a field in which the structure of a die is input, and a field in which material quality of a die is input. The input screen is displayed, for example, as a first input screen 231 shown in Fig.16. Regarding, for example, a punching machining die, a list field 231a which classifies trimming dies or forming dies on this screen 231. When a standard die field 231b of the trimming dies is selected from the list field 231a, a sectional configuration of this standard die is displayed on a shape field 231c. In this embodiment, a circle, square, oval, rectangle, WD shape, SD shape, center punch, standard burring are displayed as standard shapes. Incidentally, in this embodiment, the term "standard shape" denotes the shape determined with two parameters. When a selection button 231d is pushed in a state shown in Fig.16, the selection condition input screen 233 serving as a second input screen is displayed

15  
20  
25  
30

-34-

(Fig.17, Fig.18 and Fig.19). Displayed on this selection condition input screen 233 are a field 233a in which the kind of a machine in which a die is used is input, a field 233b in which a holder size of a die is input, a field 233c in which the structure of a punch of the dies is input, a field 233d in which material quality of the punch is input, a field 233e in which the structure of the die is input, and a field 233f in which the material quality of the die is input.

Accordingly, when predetermined data is input into the respective fields 233a to 233f, whether or not a standard die meeting these conditions exists is retrieved in the supporting apparatus of the present invention. When the standard die exists, a standard die screen 235 as shown in Fig.20 is created. Displayed on this standard die screen 235 are a sectional configuration field 235a showing a sectional configuration of a die attached with numbers specifying parts, and a part name unit price field 235b displaying the name and the unit price of each part displayed on the sectional configuration field 235a.

Accordingly, by referring to the screen 235, a price for each part in a standard die and a name of the part can be grasped easily. That is, according to the apparatus of the present invention, even when the complicated symbols for specifying the kind of a die is forgotten, it is possible to specify the die and obtain information about the price for each part in the die easily.

Incidentally, an error indication is displayed on the screen 231 or 233, when a die which does not exist

-35-

is specified.

Next, functions of a marketing supporting apparatus according to the present embodiment performed when a required product does not exist in standard dies will  
5 be explained with reference to Fig.21 to Fig.31.

Incidentally, in the followings, the commercial article mainly denotes a standard product. When the article is merely called product, it denotes a standard product and a special shape product.

10 In this case, the marketing supporting apparatus according to the present embodiment serves as an automatic designing apparatus.

(1) One example where, when a required product is a punching die, it is a punch which is used for punching  
15 machining will be explained.

When selection and input is performed by clicking a predetermined punch kind from die kinds 237a on a shape pattern selection screen 37 shown in Fig.21 (which is merely called "clicked"), a die shape pattern selection  
20 screen creating means is actuated, and the die shape pattern selection screen creating means displays a plurality of shapes according to the selected kind on a shape display field 237c in a linkage manner. Incidentally, in a case of a punching die, the shape  
25 pattern to be displayed shows a trimming hole shape formed by the punching die.

In Fig.21, according to selection of a special shape 237b for performing trimming, corresponding shapes are displayed in a field 237c. When one pattern among the  
30 displayed trimming hole shape patterns is clicked and

-36-

a selection field 237d is clicked, die size parameter input screen creating means is actuated. Next, the die size parameter input screen creating means displays a size parameter input screen 241 (Fig.23) about the  
5 selected trimming shape pattern.

The product automatic designing apparatus (product parameter setting apparatus)132 in this embodiment achieves automatic designing by retrieving the database 105. Shape data, material data, and commercial article  
10 data which are classified on the basis of shape patterns are stored in a corresponding manner in the database 105. Data of a product group corresponding to the shape patterns is divided to standard product database 151, pattern special shape (non-standard product to which a  
15 shape pattern is applicable) database 152, and non-pattern special shape (non-standard product to which a shape pattern is not applicable) database which are then stored in respective memory regions.

Incidentally, as shown on the screen 239 (Fig.22),  
20 various patterns, namely, adaptive shapes 239c, which can obtain a specific shape by performing shape change on the basis of the selected trimming shape pattern in a stage where a predetermined shape pattern has been clicked on the shape pattern selection screen 237.  
25 Accordingly, a confirmation can easily be made about which trimming hole shape pattern the required special shape die belongs to.

Fig.23 shows a die size input/output screen 241 for inputting size parameters corresponding to the shape  
30 pattern selected on the screen 237.

-37-

A figure 241b of the selected trimming hole shape pattern is displayed on the screen while size parameters to be input for specifying a shape is displayed on a shape pattern in a corresponding manner. Reference symbols  
5 A, B, K, R and S are size parameters required for specifying a trimming hole shape. While referring to the figure display 241b, required sizes are input into size parameter input field 241c. Here, when the size parameters are input, the trimming hole shape portion of the figure in  
10 the figure display 241b is changed in shape according to the input parameter values. Also, enlargement or reduction (241l) or positioning (241m) of the figure display 241b can be performed optionally. The displayed figure can be printed (241n).

15 Also, the size parameters shown about the shape pattern which is the size input screen 241 are registered as a plurality of combinations thereof in advance, and the respective combinations are limited to the minimum number of combinations required for specifying a shape  
20 which includes sizes. For this reason, it is made possible to specify the required special shape die by input of the minimum number of parameter according to the size data specified by a customer. As shown in a size input pattern display field 241a, the first parameter  
25 combination among 8 pattern-registered size parameter combinations which have been registered has been displayed in Fig.23. In order to input size parameters of a different combination, such an operation may be employed that a next size pattern screen is displayed  
30 by clicking an ordinary next screen or an entire screen



-38-

calling field. It is shown in a size input pattern display field 243b on the size input screen 243 in Fig.24 that the current pattern is the third size input pattern.

Incidentally, data pieces required for specifying  
5 die products except for the dies for trimming hole shapes are respectively shown in a commercial article code field 241e, a holder size field 241f showing a aperture of a holder supporting a die, and structure fields/material quality fields 241g to 241j of a punch or a die. The  
10 display contents of these fields include data which has been input in advance on the commercial article selection conditions input screen 233 (Fig.18).

According to the above procedure, a shape including respective size parameters, a commercial article code,  
15 structure, material quality, holder size are specified, so that a design about a special shape die which is not included in standard products is completed.

Accordingly, a die specification required through a hand-written drawing(s) and the like is selected from  
20 trimming shape patterns defined preliminarily, and the selected trimming hole shape pattern is shape-changed by applying specific size parameters thereto, so that a desired trimming hole shape can be specified.

(2) A case where a required product is a bending  
25 die.

Next, an example where a required product is a bending die used for bending machining will be explained. In the case of the bending die, reference shapes of respective standard products are stored as shape patterns,  
30 and a die shape meeting a required product specification

-39-

can be obtained by shifting the selected shape patterns.

When a predetermined bending kind is clicked from die kinds 249a on a bending shape pattern selection screen 249 shown in Fig.27, die shape pattern selection screen creating means is actuated. The die shape pattern selection screen creating means displays a plurality of shape patterns of bending dies on a shape display field 249c in an interlocking manner according to the selected kind.

10 In Fig.27, according to selection of a goose neck shape 249b, a corresponding shape patterns are displayed in a field 249c. When one pattern is clicked among the displayed goose neck shape patterns and selection field is clicked, a die size parameter input screen creating means is actuated. Next, the die size parameter input screen creating means displays a size specific input/output screen 251 (Fig.28) about the selected goose neck shape pattern.

Incidentally, on the screen 249 (Fig.27), various patterns, namely, adaptive shapes 249e, which can obtain a specific shape by performing shape-change on the basis of the selected goose neck shape pattern in a stage where a predetermined shape pattern 249d has been clicked on the shape pattern selection screen 249 can be displayed.

25 Accordingly, a confirmation can easily be made about which goose neck shape pattern the required special shape die belongs to. Incidentally, as shown in Fig.27, in the case of the bending dies, respective shape patterns correspond to specific commercial article codes and catalog numbers on a catalog. Accordingly, a stage where

30

-40-

this shape pattern has been selected means that size parameters (including an angle) about a main portion has been specified. In Fig.27, numeral 453 in the selected shape pattern 249d displays upper three figures of a catalog number to which the shape pattern belongs.

Fig.28 shows a die shape specifying screen 251 in which size parameters are input according to the shape pattern selected on the screen 249.

A figure 251b of the selected goose neck shape pattern and a divided ear shape are displayed on the screen 251 with size parameter values for specifying the goose neck shape displayed on the shape pattern. An angle at a tip end portion used for bending is shown as 88° which is a predetermined value. Meanwhile, as for a tip end R (roundness of a tip end portion of a bending die), a plurality of selectable parameter values, namely 0.2, 0.6, 0.8, 1.5 and 3.0, are displayed for the shape pattern.

While referring to this figure data 251b, a desired tip end value is input into a tip end R input field 251c.

According to the above procedure, a shape including respective size parameters, a commercial article code, a catalog number, (and a structure, material quality and the like specified by the commercial article code and the catalog number) are specified, so that designing of a standard product and a special shape die which is not covered with standard products are completed.

Here, shape change is performed on the goose neck shape of the display 251a so that a goose neck shape of a special shape can be obtained. In this case, a special mention item field 251d shown in Fig.28 is clicked. In

32

-41-

response to this click, die shape specifying screen creating means is actuated. The die shape specifying screen creating means displays a special mention item selection screen 253 (Fig.29). A commercial article code and catalog number 253a of the selected shape pattern is displayed on the special mention item selection screen 253 together with a corresponding commercial article name 253a. Special specification items which are applicable to the selected shape pattern are recited on an applicable special mention item field 253c. In Fig.29, for example, when a customer specifying mark 253d is selected, it is copied to an application special mention item field 253g so that special mention items to be applied can be grasped easily.

Also, regarding the selected shape pattern, an additional machining item field 253e accompanying shape change is displayed on the special mention item selection screen 253. Adjustment or the like of a tip end angle, a tip end R, a special ear shape, a product recess is made selectable using the additional machining item field 253e. Here, when a tip end angle change 253f is selected, the die shape specifying screen creating means further displays a tip end angel change screen 255 (Fig.30).

In Fig.30, the selected goose neck shape pattern is displayed as figure data 255a while size parameters of portions capable of being additionally machined are shown. The current parameter values of a tip end angle (K) and the tip end R (R) which are changeable size parameter are displayed in a size input field 255c. A special shape bending die can be designed by replacing

-42-

the displayed parameter values with desired parameter values. The shape of the figure data 255a is also changed and displayed in an interlocking manner with the replacement of the parameter values.

5 According to the above procedure, a shape including respective size parameters, a commercial article code, a structure and material quality are specified so that designing of a special bending die which is not covered with standard products is completed.

10 Accordingly, a die specification required through a hand-written figure(s) or the like is selected from predetermined bending shape patterns without consciousness about whether the die is a standard product or it is a special shape product, and size parameters  
15 necessary for additional machining are applied to the selected bending shape pattern so that a desired bending shape can be specified by shape-changing the bending shape pattern.

Next, functions of the marketing supporting  
20 apparatus according to the present embodiment which verifies whether or not a product which has been designed according to the automatic designing apparatus can be machined will be explained with reference to Fig.21 to Fig.31.

25 In this case, the marketing supporting apparatus according to this embodiment functions as a machining possibility calculating apparatus.

(1) In a case of a punching die, first of all, one example where a punching die has been designed will be  
30 explained. The thickness and material quality of a

-43-

workpiece to be machined are input into the machined material input field 243d on the above-mentioned input screen, for example, 243 (Fig.24). As shown in Fig.25, here, a clearance value 245f, the clearance being formed  
5 between an outer diameter of a punch and an inner diameter of a die, and the total number of shots 245g are further input, and the machining possibility field 245b is clicked. Material data input means actuated by this click delivers data of material to be machined to machining verification  
10 means according to input of the data of material to be machined.

Meanwhile, as shown in Fig.24, according to input of a commercial article code 243e of a punch, a holder size 243f, structure and material quality 243g to 243i  
15 of a punch/a die, the die data input means delivers this shape data to the machining verification means. Incidentally, as the data pieces shown in 243e to 243i, data pieces which have been already input through input into the above-mentioned commercial article condition  
20 input screen have been displayed.

The machining verification means first performs verification about whether or not the design shape can be machined on the basis of these machined material data and die data. Specifically, the machining possibility  
25 means performs this verification by comparing resisting pressure obtained by strength calculation from die data of the selected die (shape data/structure data/material quality data) and machining requiring pressure required for punching workpiece on a specified material which is  
30 required from material data (plate thickness and material

-44-

quality) with each other.

The machining verification means checks consistency about whether or not the size parameters applied to the shape pattern constitute a trimming hole shape.

In Fig.25, the results of these verifications is displayed as a message "capable of machining" on a message field 245c.

Accordingly, determination about whether or not the die which has been designed in the automatic designing apparatus is a die which can bear an actual machining can be grasped simultaneously with the design of the die.

(2) Case of a bending die

Next, one example where a bending die has been designed will be explained. The plate thickness 255f and the material quality 255g of a workpiece to be machined are input into the machined material input field on, for example, the field 255 of the above-mentioned die shape specifying input screen (Fig.30). Material data input means actuated by clicking the machining possibility field 255b delivers data of the material to be machined to the machining verification means according to input of these data pieces of material to be machined.

Meanwhile, as shown in Fig.30, when respective size data, material quality data, structure data and a tip end angle or a tip end R of the shape pattern of the bending have been corrected, the die data input means delivers the die data to the machining verification means according to input of the corrected size data.

Also, as shown in Fig.30, in the case of the bending

-45-

die, the V width of the die is further input. Since this V width has been registered in advance as a default value, when input of the width is omitted, the default value is used as the V width. The V width data is also delivered  
5 to the machining verification means as a part of the die data. The machining verification means performs verification similar to the case (1) of the punching die on the basis of these material data and die data.

As shown on a machining possibility verification  
10 screen 255 (Fig.30), the verification result about machining possibility "resisting pressure: 45 ton/m and machining requiring pressure: 51 ton/m (calculation as V width = 48 mm) is displayed in the message field 255j. Simultaneously, an alarm message "resisting pressure  
15 lack" is displayed on the message field 255k to call an operator's attention.

Accordingly, a determination about whether or not the bending die which has been designed in the automatic designing apparatus is a die which can bear an actual  
20 machining can be grasped by the display of the verification result simultaneously with the designing.

Next, functions of the marketing supporting apparatus according to this embodiment which creates estimate information of a product which has been designed  
25 by the automatic designing apparatus and has been verified by the machining possibility calculating apparatus will be explained with reference to Fig.26 to Fig.34.

In this case, the marketing supporting apparatus according to the embodiment functions as an estimate  
30 information outputting apparatus.



-46-

As shown on the parts list screen 247 (Fig.26), parts relating to a punch to be estimated are displayed on a parts display field 247a by selection of the shape pattern and input of the size parameters as described in Fig.22 to Fig.25 without directly inputting a commercial article code, a catalog number and the like. Purchase unit of the die product which has been designed and verified is displayed on a parts list display field 247b so as to correspond to the display of parts.

When a predetermined purchase unit is selected by clicking on this parts list field 247b, detail estimate information creating means is actuated. This detail estimate information creating means reflects and displays the commercial article data of the selected die product on an estimate list field 259c of the estimate detail screen 259 shown in Fig.32.

Like the above, regarding the bending die, as shown on the parts list screen 251 (Fig.28), when a predetermined purchase unit is selected by clicking on this parts list field 251b, detail estimate information creating means is actuated. This detail estimate information creating means reflects and displays the commercial article data of the selected die product on an estimate list field 259c of the estimate detail screen 259 shown in Fig.32.

Fig.32 is the estimate detail screen 259 in this embodiment. The commercial article data such as a commercial article code of a die product selected from each list, a catalog number, quantity, shape, a commercial product name and the like is displayed on the estimate

-47-

list field 259c. When a calculation button 259m is clicked on the estimate detail screen 259, the estimate of each die product displayed in the list is displayed.

Price data and delivery time data about each die product to be estimated can be confirmed on the estimate detail screen 259. For example, it is assumed that, for example, a die product of a catalog number 45302E has been pointed in the second line of the estimate list field 259c. Regarding the pointed die product, unit cost 259g, price 259p, discount rate 259k, discount amount 259l and the like are displayed as price data together with a commercial article name 259f. This discount rate 259k is a value which has been set in advance for each customer and for each product (each product group). The discount amount 259l is calculated on the basis of the discount rate 259k and the product unit cost 259g, and an estimate amount is displayed as a value obtained by subtracting the discount amount 259l from the product unit cost 259g. At this time, it is possible to select application of a variable discount rate set for each customer or application of a fixed discount rate.

Simultaneously, a reference delivery time 259h, a deliverable day 259i, a customer request delivery day 259j and the like are displayed as delivery time data. As for the reference delivery time, a value (necessary days) which has been set preliminarily for each product (each product group) is displayed with a specific delivery time code in a corresponding manner.

Day obtained by decoding this delivery time code to the number of necessary days to add the same to the

-48-

current date is displayed on the deliverable day 259i.

When an estimate issue button 259n is clicked on the detail estimate screen 259, information on the detail estimate screen 259 is output as an estimate 263 of a formal format which can be submitted to a customer (Fig.34). As shown in Fig.34, an offered price 263i to which a total discount amount 263h applied to the estimated die product is applied can be presented. Incidentally, the estimate can be output not only to a printer connected to the marketing supporting apparatus according to the embodiment but also to a facsimile provided on a place specified by a fax output indication button 261i (Fig.33).

Accordingly, it is made possible to input a die product to be estimated easily and rapidly by specifying commercial article data from the shape pattern and the size parameters without directly inputting a commercial article code or a catalog number. Incidentally, in this time, it is a matter of course that input contents of the shape and size parameters (shape data) which have been input by the design and verification are stored and corresponding commercial article data can be input in an interlocking manner with the input means for estimate information on the basis of the stored shape data.

Also, discount data and delivery time data necessary to present an estimate is stored in advance and the estimate is prepared using these data pieces so that an instant response of a required die product can be performed.

Finally, the marketing supporting apparatus

-49-

according to this embodiment which outputs and transmits order reception information according to the prepared estimate information of a product will be explained.

In this case, the marketing supporting apparatus  
5 according to the embodiment functions as an order reception information creating apparatus.

When a customer indicates his/her intention of purchase on the estimate detail screen 259 shown in Fig. 32 or in response to the output result of this estimate detail  
10 information, an order reception decision button 259o is clicked on the estimate detail screen 259.

Order reception information to which an order reception number has been given and which including the contents of the estimate information is prepared by  
15 clicking this order reception decision button 259o. Here, a sales person connects a predetermined portable communication equipment 107 (Fig. 1) to the marketing supporting apparatus according to the embodiment, and he/she online-transmits/reflects the order reception  
20 information to a head office database such as order reception database/manufacture database (not shown) or the like through the portable communication equipment 107. The order reception database in the head office is updated by the transmission of the order reception  
25 information, and simultaneously a manufacture instruction can be transmitted to a manufacture department having the manufacture database at real time to instruct manufacture start.

The manufacture schedule and the delivery schedule  
30 about the order-received die product are stored in the

-50-

manufacture database in the head office. For this reason, the marketing supporting apparatus according to the embodiment can obtain deliverable day as return data to transmission of the order reception information in view  
5 of an actual schedule about the order-received die product.

After transmission of the order reception information, it is possible to output an order acknowledgment through a printer, a facsimile or the like  
10 to provide it to a customer by clicking a predetermined button on the screen in Fig.32.

Meanwhile, in a case that the marketing supporting apparatus according to the embodiment is used off line, after an sales person returns back to a sales branch or  
15 the like, he/she may reflect this order reception information to the head office database such as order reception database/manufacture database or the like.

Accordingly, it is made possible to decide an order reception rapidly and start manufacture early. That is,  
20 the order-received die product can be delivered early.

Incidentally, Fig.35 is an explanatory diagram of an example of a main menu 265 on a portable terminal for a sales person according to the embodiment of the present invention. A series of processings of the above  
25 marketing support belongs to a consultant 265d and an estimate 265e in a day processing menu 265b on the main menu. Besides the processings for the above-mentioned sales support, processings necessary for morning, day (daytime), and evening according to a timetable of one  
30 day of a sales person, respectively can be timely called

-51-

from one main menu 265 to be processed.

Fig.36 to Fig.43 show another embodiment of the machining possibility calculating apparatus.

In this case, a bending die is selected on the basis  
5 of a workpiece shape. For this reason, as shown in Fig.36,  
first, a display 270a is clicked on a left field on a  
workpiece selection screen 270. Thereby, selection  
branches 270b are displayed on a right field on the screen  
270. Here, for example, a workpiece shape 270c is  
10 selected on the basis of an order drawing from a customer.

Then, as shown in Fig.37, a workpiece size input  
screen 272 is displayed on the display apparatus. While  
referring to a workpiece shape 272a on a right field,  
desired numerals are input into a size field 272b on a  
15 left field. At this time, a size guide display 272c is  
displayed on the right field in an aspect accompanying  
the workpiece shape 272a. Accordingly, input of sizes  
of the workpiece can easily be performed. Thereafter,  
for example, a standard die 272e is selected from a die  
20 selection field 272d.

As shown in Fig.38, an interference state display  
screen 274 showing an interference state between the  
workpiece shape 272 and the standard die shape 274a is  
displayed. As shown in Fig.38, when the standard die  
25 274a interferes with the workpiece, another standard die  
274b is selected from the die selection field 274  
displayed simultaneously. Thereby, while referring to  
the interference between a workpiece and a selected die,  
an optimal die can be selected easily.

30 When there is no die that does not interfere with

-52-

the workpiece in standard dies included in the die selection field 272d, a die 276a which does not interfere with the workpiece so much is selected from the standard dies of the die selection field 272d and it is additionally  
5 machined (Fig.39). In this case, as shown in Fig.39, after the minimum interference die 276a is selected, an additional machining & resisting pressure calculation field 276b is clicked.

Thereby, as shown in Fig.40, an additional machining  
10 specifying screen 278 is displayed. A position and an amount of additional machining are input in an additional machining specifying field 278a on this screen 278. Thereby, a locus of an additional machining is displayed on a screen displaying the die 276a and the workpiece  
15 272a. Accordingly, according to this apparatus, the position/amount of additional machining can easily be determined while referring to the screen. When input of the position/amount of the additional machining is completed, a calculation about whether a die which has  
20 been machined additionally can be used is made simultaneously, and the calculation result is displayed on a left field 278c on the screen 278. Accordingly, a determination about possibility of the additional machining is made easily.

25 According to the above, when the additional machining is determined to be performed and an amount reference field 278d is clicked, a price display screen 280 shown in Fig.41 is displayed. A die price input field 280a and an additional machining price input field 280b  
30 are included on this price display screen 280. Therefore,

-53-

according to this apparatus, a price of the final die including the additional machining cost can easily be confirmed.

Fig.42 and Fig.43 show a case that, when the additional machining is performed on an appropriate standard die 274a, the die has been made unusable as a result.

In this case, when a proper amount of additional machining is input into an additional machining specifying field 282a of an additional machining specifying screen 282 and an additional machining performing field b is clicked, an additional machining result screen 284 shown in Fig.43 is displayed. A reason that the die which has been subjected to additional machining is unusable is displayed in an impossible reason display field 284a on this screen 284.

Incidentally, the screens 270, 272, 274, 276, 278, 280, 282, and 284 are respectively created by respective screen creating means for creating each screen.

Incidentally, the present invention is not limited to the above embodiments, but it may be modified in various manners without departing from the scope of the present invention.

## Industrial Applicability

As explained above, according to the present invention, the following effects can be attained.

That is, functions for retrieving/displaying a product to be proposed are provided through various approaches such as increase profit calculation, a problem



-54-

solving die or the like from many product groups. For this reason, efficient and various product proposal activities can be employed.

Also, the present invention provides functions for  
5 storing shape patterns and corresponding size parameters of products relating to product data to perform automatic designing/drawing checking/estimating in an interlocking manner. For this reason, it is made possible to propose an estimate about not only standard  
10 products but also special shape products instantaneously without returning back to a head office and perform early order reception/early delivery.

In this manner, using the present invention, it is made possible to improve marketing productivity in both  
15 stages of commercial article proposal and preparation of estimate and to shorten product delivery time and reduce marketing costs.

-55-  
CLAIMS

1. An increase profit calculating apparatus,  
comprising:
- 5 first marketing object screen creating means which  
creates a first marketing object screen (205) for  
displaying a first marketing object; and
- increase profit screen creating means which is  
operated in response to a click operation of a specific  
10 mark on the first marketing object screen (205) and which  
creates an increase profit screen (207) for displaying  
increase profit by employing the first marketing object  
instead of a second marketing object corresponding to  
the first marketing object,
- 15 the increase profit screen (207) comprising:  
question item fields (207a - 207d) which issues a  
plurality of questions about works relating to the first  
marketing object and the second marketing object and costs  
for the works;
- 20 a field (207i) which displays a first total cost  
due to use of the first marketing object within a  
predetermined period;
- a field (207j) which displays a second total cost  
due to use of the second marketing object within the  
25 predetermined period; and
- a field (207k) which displays increase profit  
obtained by employing the first marketing object instead  
of the second marketing object,
- wherein the increase profit calculating apparatus  
30 is provided with calculating means which calculates the

-56-

first and second total costs, and the increase profit according to answers to the questions from an operator.

2. An increase profit calculating apparatus  
5 according to claim 1, wherein the marketing object includes a product such as a die apparatus, a mechanical part, a blade of a machine tool, a machine tool or the like, or service such as maintenance for the product.

10 3. An increase profit calculating apparatus according to claim 1, wherein the plurality of questions relating to the first marketing object and the second marketing object include a question about the number of works within a predetermined period, and a question about  
15 a time required for one time work.

4. An increase profit calculating apparatus according to claim 1, wherein the marketing object is a die apparatus, and the question item includes one of  
20 a question group about the number of die apparatus operations per day, a die apparatus operation time per one time, a labor cost per predetermined time, and working days within a predetermined term;

a question group about personnel or mechanical  
25 idling time caused by inferiority machining occurring due to use of a second die, labor cost within a predetermined time, and working days within a predetermined term; and

a question group about total working time within  
30 a predetermined term in a case that predetermined

-57-

machining is performed using the second die, total working  
time within a predetermined term in a case that the same  
machining is performed using a first die, labor cost per  
predetermined time, and working days within a  
5 predetermined term.

5. An inferiority phenomena countermeasure guiding  
apparatus comprises: inferiority phenomena screen  
creating means which creates an inferiority phenomena  
10 screen (209) for displaying a plurality of inferiority  
phenomena in machining using a marketing object; and  
inferiority phenomena cause screen creating means  
which is actuated by clicking a display portion of one  
inferiority phenomenon on the inferiority phenomena  
15 screen (209) to create an inferiority phenomena cause  
screen (211) for displaying causes of the one inferiority  
phenomenon.

6. An inferiority phenomena countermeasure guiding  
20 apparatus according to claim 5, wherein the inferiority  
phenomena cause screen (211) displays a list of the  
causes.

7. An inferiority phenomena countermeasure guiding  
25 apparatus according to claim 5, wherein the marketing  
object is a punching die, and the causes of inferiority  
phenomenon are spring fatigue, clearance unsuitableness  
and the like.

30 8. An inferiority phenomena countermeasure guiding

-58-

apparatus according to claim 6, further comprising avoidance information screen creating means which is actuated by clicking a display portion of one cause in a list of the causes to create an avoidance information  
5 screen (213) for displaying information for avoiding the cause.

9. An inferiority phenomena countermeasure guiding apparatus according to claim 8, comprising new product  
10 screen creating means which is actuated by clicking a predetermined portion of the inferiority phenomena cause screen (211) or the avoidance information screen (213) to create a new product screen (217) for displaying a new product for avoiding the inferiority phenomenon.

15

10. An inferiority phenomena countermeasure guiding apparatus according to claim 5, further comprising reference value screen creating means which is actuated by, when one cause in the inferiority  
20 phenomena cause list is offset from a reference value of a predetermined parameter, clicking a display portion of the cause on the inferiority phenomena cause screen (211) to create a reference value screen (219) for displaying the reference value.

25

11. An inferiority phenomena countermeasure guiding apparatus according to claim 6, wherein a question field about characteristics of material for defining the reference value is provided on the reference value screen  
30 (219).

-59-

12. An inferiority phenomena countermeasure guiding apparatus according to claim 11, wherein the characteristics of material are material quality and plate thickness of a material.

13. An inferiority phenomena countermeasure guiding apparatus according to claim 12, wherein a question field about the current value of the parameter is provided on the reference value screen (219).

14. An inferiority phenomena countermeasure guiding apparatus according to claim 10, further comprising accompanying disadvantage screen creating means which is actuated by clicking a predetermined portion on the reference value screen (219) to create an accompanying disadvantage display screen (221) for displaying other inferiority phenomena or disadvantages which may occur due to the cause.

20

15. An inferiority phenomena countermeasure guiding apparatus, comprising cause/countermeasure screen creating means which creates a cause/countermeasure screen (223) which displays a cause of an inferiority phenomenon in machining using a marketing object and a plurality of a first kind of countermeasures for avoiding the inferiority phenomenon due to the cause; and

countermeasure explanation screen creating means which is actuated by clicking a display portion of one

-60-

countermeasure on the cause/countermeasure screen to create a countermeasure explanation screen (225) for explaining specific contents of the countermeasure.

5        16. An inferiority phenomena countermeasure guiding apparatus according to claim 15, wherein the marketing object is a die for bending.

10        17. An inferiority phenomena countermeasure guiding apparatus according to claim 15, comprising new product screen creating means which is actuated by clicking a predetermined portion on the cause/countermeasure screen (223) or the countermeasure explanation screen (225) to create a new product screen  
15        (227) for displaying a new product for avoiding the inferiority phenomenon due to the cause.

20        18. An inferiority phenomena countermeasure guiding apparatus according to claim 17, further comprising new product detail screen creating means which is actuated by clicking a predetermined portion on the new product screen (227) to create a new product detail screen (229) for displaying detail explanation such as suitable material/suitable apparatus/function or the  
25        like of the new product.

19. A question-answer accumulating apparatus comprising:  
means which inputs a question about a marketing  
30        object;

-61-

means which inputs an answer to the question; and  
means which stores the question and the answer in  
a mutually related manner.

5        20. A die retrieval apparatus comprising:  
die data input screen creating means which creates  
die data input screens (231, 233) provided with a  
plurality of fields in which features of a marketing  
object are input; and  
10        standard die screen creating means which is actuated  
by inputting data items into respective fields on the  
input screens (231, 233) and which, when a marketing  
object corresponding to the respective data items exists,  
creates a standard die screen (235) for displaying a price  
15 relating to the marketing object and, when no marketing  
object corresponding to the respective data items exists,  
creates an error indication.

21. A die retrieval apparatus according to claim  
20, wherein the plurality of fields in which features  
of a marketing object are input include a field (231a)  
in which a shape of the marketing object is input, a field  
(233a) in which the kind of a machine in which the marketing  
object can be used is input, fields (233c, 233e) in which  
25 the structure of the marketing object is input, and fields  
(233d, 233f) in which the material quality of the  
marketing object is input.

22. A die retrieval apparatus according to claim  
30 21, wherein a part list name of the marketing object and



-62-

a price of each part are displayed on the standard die screen (235).

23. A product parameter setting apparatus  
5 comprising:

marketing object shape selection screen creating means which creates shape pattern selection screens (237, 239) for selecting a shape relating to a marketing object to be set with parameters; and

10 marketing object size parameter input screen creating means which is actuated according to selection and input of a specific shape pattern on the marketing object shape selection screens to create a marketing object size parameter input screen (241) in which size  
15 parameters of predetermined portions about the selected marketing object shape.

24. An apparatus according to claim 23, wherein the shape parameter selection screens (237, 239) includes  
20 a field (237a) for selecting the kind of the marketing object to be set with parameters and a field (237c) for allowing a shape pattern relating to the marketing object to be set with parameters.

25 25. A product parameter setting apparatus according to claim 24, wherein the marketing object size parameter input screen (241) comprises

a shape pattern display field (241b) which displays the selected marketing object shape pattern and a size  
30 parameter input portion necessary for specifying the

-63-

shape of the marketing object to be set with parameters,  
and

a size parameter input field (241c) which allows  
input of size parameters of the input portion.

5

26. A product parameter setting apparatus according  
to claim 25, further comprising parameter setting means  
which performs parameter setting on marketing object  
products which are classified on the basis of shape  
10 patterns of marketing objects, the parameter setting  
being performed according to correspondence relationship  
between the shapes of the marketing objects which have  
been stored in advance and size parameter groups necessary  
for specifying the shapes of the marketing objects.

15

27. A product parameter setting apparatus according  
to claim 26, wherein the shape pattern is stored so as  
to correspond to a plurality of size parameter groups  
necessary for specifying the shape of the marketing object  
20 which belongs to the shape pattern, and

the marketing object size parameter input screen  
(241) includes a size input pattern selection field which  
allows selection of one size parameter from the plurality  
of size parameter groups.

25

28. A product parameter setting apparatus according  
to claim 26 or 27, wherein the shape pattern selection  
screens (237, 239) further comprises an application shape  
display field (239c) which displays one or plural shape  
30 sub-patterns included in shape variations of the selected

-64-

shape pattern.

29. A product automatic designing apparatus (product parameter setting apparatus), comprising:

5 marketing object shape pattern selection screen creating means which creates a shape pattern selection screen (237) which allows selection of a trimming hole shape of a marketing object apparatus used for machining of a predetermined kind, such as a punching or the like;  
10 and

marketing object size parameter input screen creating means which is actuated according to the selection and input of a specific trimming hole shape pattern on the marketing object shape selection screen  
15 to create a marketing object size parameter input screen (241) which allows input of size parameters about the trimming hole shape pattern of the selected marketing object, wherein

the shape pattern selection screen (237) includes  
20 at least a field which allows selection of the kind of a marketing object to be designed (to be set with parameters), and

a field which allows selection of the trimming hole shape pattern of the marketing object to be designed (to  
25 be set with parameters); and

the marketing object size parameter input screen (241) includes at least a shape pattern display field (241b) which display the trimming shape pattern of the selected marketing object and an input portion of size  
30 parameters necessary for specifying the trimming hole

-65-

shape of the marketing object to be designed (to be set with parameters), and

a size parameter input field (241c) which allows input of size parameters of the input field.

5

30. A product automatic designing apparatus (product parameter setting apparatus), comprising:

marketing object shape pattern selection screen  
creating means which creates a shape pattern selection  
10 screen (249) which allows selection of a shape of a  
marketing object used for machining of a predetermined  
kind, such as a bending or the like; and

marketing object size parameter input screen  
creating means which is actuated according to the  
15 selection and input of a specific shape pattern on the  
marketing object shape selection screen to create a  
marketing object size parameter input screens (251, 253)  
which allow input of size parameters about the shape  
pattern of the selected marketing object, wherein

20 the shape pattern selection screen (249) includes  
at least a field (249a) which allows selection of the  
kind of the marketing object to be designed (to be set  
with parameters), and

a field which allows selection of the shape pattern  
25 relating to the marketing object to be designed (to be  
set with parameters); and

the marketing object size parameter input screens  
(251, 253) include at least a shape pattern display field  
(251a) which displays the selected marketing object shape  
30 pattern and main size data of the marketing object shape

-66-

pattern, and

a size parameter input field which allows shift of the selected shape pattern and input of size parameters for specifying a desired shape.

5

31. A machining possibility calculating apparatus comprising:

marketing object data input means which inputs marketing object data including shape data of a predetermined marketing object specified by a shape pattern and size parameters of a marketing object to be designed, structure data of the marketing object, and material quality data;

material data input means which inputs material data including features of material to be machined by the marketing object; and

machining verification means which verifies whether or not the marketing object to be designed is capable of being machined on the basis of the input marketing object data and material data.

32. A machining possibility calculating apparatus according to claim 31, wherein the features of the material to be machined includes the plate thickness and the material quality of a plate material.

33. A machining possibility calculating apparatus according to claim 32, wherein the machining verification means performs the verification by comparing the resisting pressure of the marketing object obtained

-67-

according to strength calculation from the marketing  
object data and machining requiring pressure necessary  
for machining which is performed by the marketing object  
which has been obtained from the material data with each  
5 other.

34. A machining possibility calculating apparatus  
according to claim 31 or 33, wherein the machining  
verification means performs the verification by checking  
10 consistency between the input size data pieces.

35. A machining possibility calculating apparatus  
according to any one of claims 31 to 34, wherein, when  
the marketing object to be designed is a die for machining  
15 of a predetermined kind such as punching or the like,  
the marketing object data includes structures and  
material qualities of a punch and a die, and a clearance  
between the punch and the die.

20 36. A machining possibility calculating apparatus  
according to any one of claims 31 to 34, wherein, when  
the marketing object to be designed is a die apparatus  
for machining of a predetermined kind such as bending  
or the like, the marketing object data further includes  
25 a tip end R, a tip end angle of the die, and a V width  
of the die.

37. An automatic estimate creating apparatus  
comprising:  
30 input means which inputs product data to be estimated,

-68-

the number of the products and customer data;

estimate data storage means which stores delivery time data corresponding to the product and discount rate data of the product to its price; and

5 detail estimate information creating means which outputs detail estimate information on the basis of the input data, wherein

the detail estimate information to be output includes a deliverable day according to the delivery time  
10 data and discount amount according to the discount rate data.

38. An automatic estimate creating apparatus according to claim 37, wherein the product data to be  
15 estimated is input by specifying the shape of the product and/or the material quality thereof.

39. An automatic estimate creating apparatus according to claim 37 or 38, wherein the input means  
20 further inputs special mention specification data about the input product, and

when the special mention specification is charged, the detail estimate information creating means further adds a price corresponding to the special mention  
25 specification to a marketing price of the product and creates estimate information on the basis of a marketing unit price after added.

40. An order reception information creating  
30 apparatus comprising:

-69-

order reception information screen creating means which displays an order reception information screen of a order-received product at a marketing place; and


order reception information transmitting means  
5 which is actuated by clicking a specific mark on the order reception information screen to transmit the order reception to a manufacture end.

41. An order reception information creating  
10 apparatus according to claim 40, further comprising delivery data update display means which changes a delivery day of a product received in response to the transmission of the order reception according to a manufacture schedule to display the changed delivery day  
15 on the order reception information screen.

42. A computer readable storage medium which stores a computer program which allows a computer to function as any one of the apparatuses according to claims 1 to  
20 41.



FIG.1

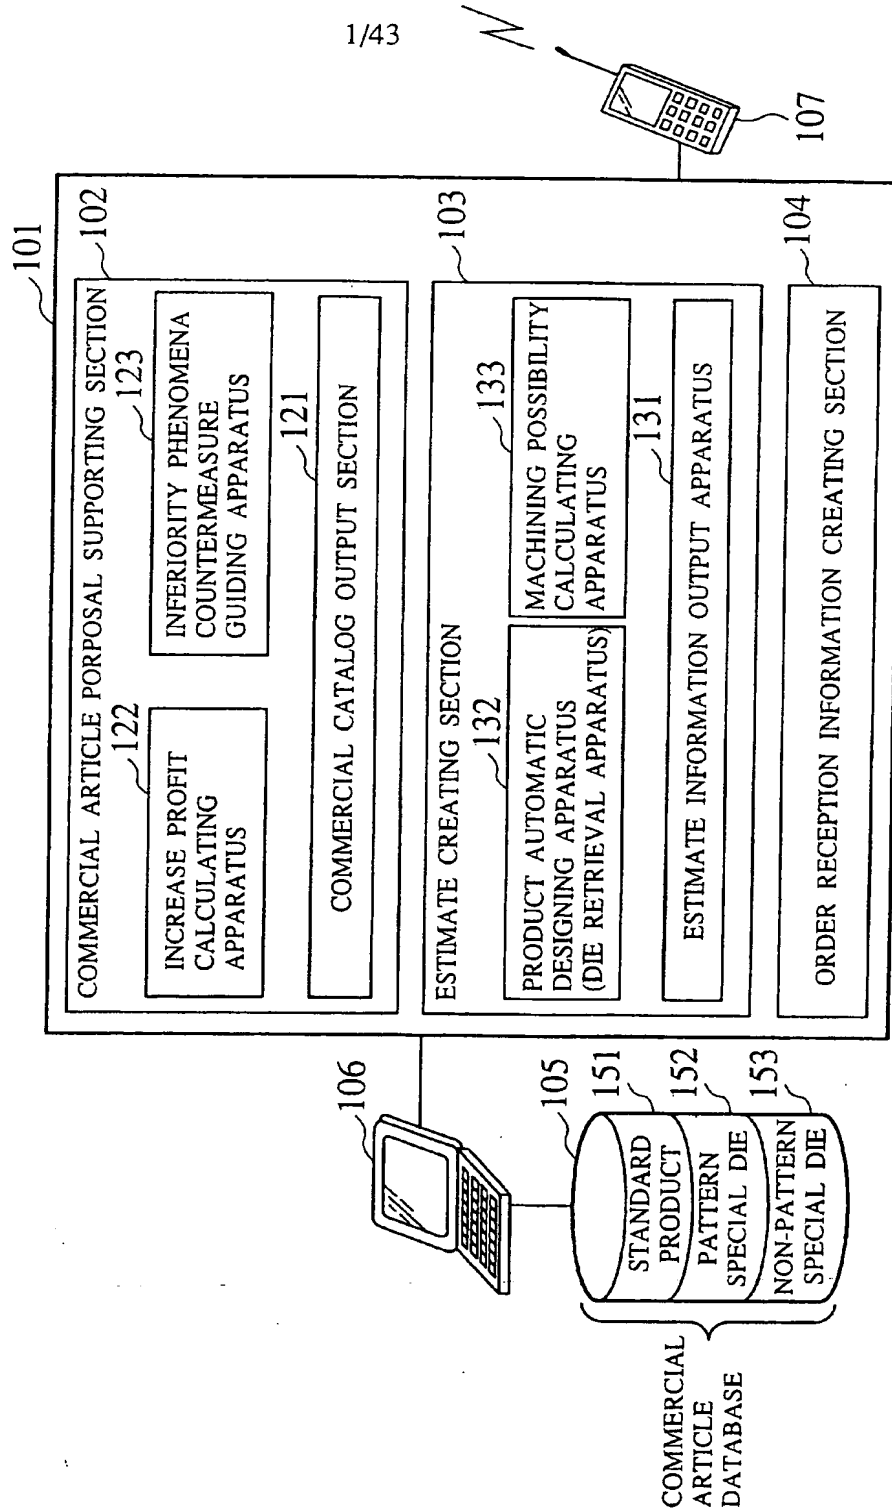

1/43

FIG.2

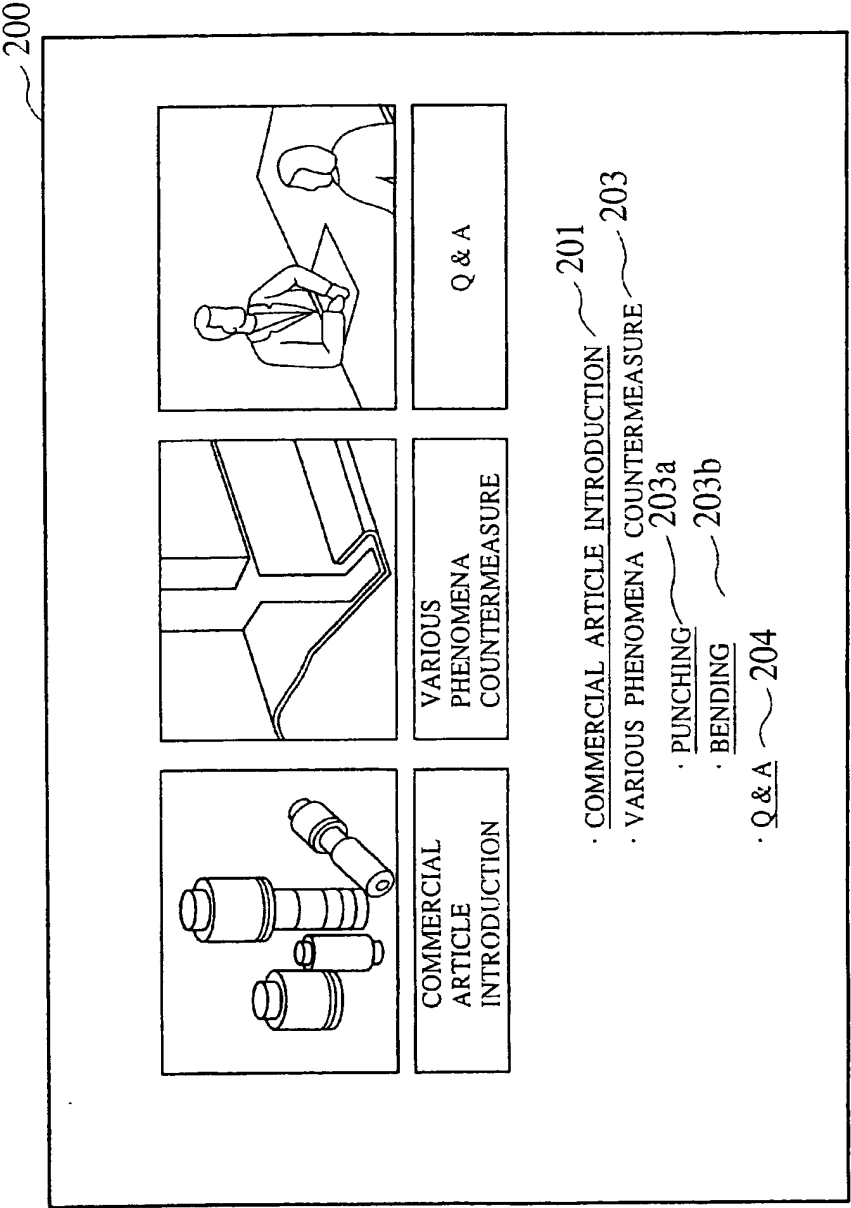


FIG.3

PROPOSAL FOR  
PROFIT INCREASE

TRIPLE HOLDER

SEMI-AUTOMATIC  
TRIPLE HOLDER

IIOME

MENU

TRIPLE HOLDER

○ PUNCHING DIE HOLDER WITH TRIPLE ROLES




○ LIGHT ONE-TOUCH MECHANISM FOR DIE SELECTION OWING TO EMPLOYMENT OF FREE BEARING

○ EASY AND SECURE SHOT PIN SYSTEM FOR DIE POSITIONING

FOR PUNCH SET (PS) DIES

FOR PR DIES

FOR NTC LONG DIES

DIED TO BE USED	SA-64, SA-50, SA-38	1/4", 1/4", 1/4" (1/2")	1/4", 1/4", 1/4" (1/2")
SLEEVE TO BE USED	SA-32, 38, 50 EACH SLEEVE (OPTION)	1/2"	(STANDARD)
HOLDER INTERIOR LENGTH	450(350)mm	450(350)mm	450mm
OPEN HEIGHT	230mm	244mm	313mm
SHUT HEIGHT	212mm	226mm	295mm
DIE HEIGHT	89mm	89mm	89mm

INSDOCID: <CA 2337467A1\_I\_>

FIG.4

207

<p>PROPOSAL FOR INCREASE PROFIT</p> <p>TRIPLE HOLDER</p> <p>SEMI-AUTOMATIC</p> <p>TRIPLE HOLDER</p> <p>HOME MENU</p>		<p>TRIPLE HOLDER INCREASE PROFIT 207a</p> <p>(A) NUMBER OF HOLDER EXCHANGES PER ONE DAY? ~ 207b : 10 TIMES ~ 207e</p> <p>(B) HOLDER EXCHANGE TIME PER ONE EXCHANGE? : 15 MIN. ~ 207f</p> <p>(C) LABOR COST OF WORKING PERSON PER ONE HOUR ? : 3000 YEN ~ 207g</p> <p>(D) WORKING DAYS PER ONE MONTH? ~ 207d : 22 DAYS ~ 207h</p> <p>207c</p> <p>[CALCULATION]</p> <p>LABOR COST REQUIRED FOR HOLDER EXCHANGE</p> <p>● SINGLE HOLER</p> <p>LABOR COST PER ONE HOUR × EXCHANGE TIME PER ONE × NUMBER OF EXCHANGES</p> <p>PER ONE DAY × WORKING DAYS PER ONE MONTH</p> <p>= 165,000 YEN</p> <p>207i</p> <p>● TRIPLE HOLDER</p> <p>HOLDER EXCHANGE TIMES BECOMES 1/3 SINCE BECAUSE THREE DIES CAN BE MOUNTED ON TRIPLE HOLDER</p> <p>LABOR COST PER ONE HOUR × EXCHANGE TIME PER ONE TIME × NUMBER OF EXCHANGES PER ONE DAY × 1/3 × WORKING DAYS PER ONE MONTH</p> <p>= 55,000 YEN</p> <p>207j</p> <p>INCREASE PROFIT PER ONE MONTH = LABOR COST OF CONVENTIONAL SINGLE HOLDER - LABOR COST OF INTRODUCED TRIPLE HOLDER = 110,000 YEN</p> <p>207k</p> <p>[RETURN]</p>
--	--	---

FIG.5



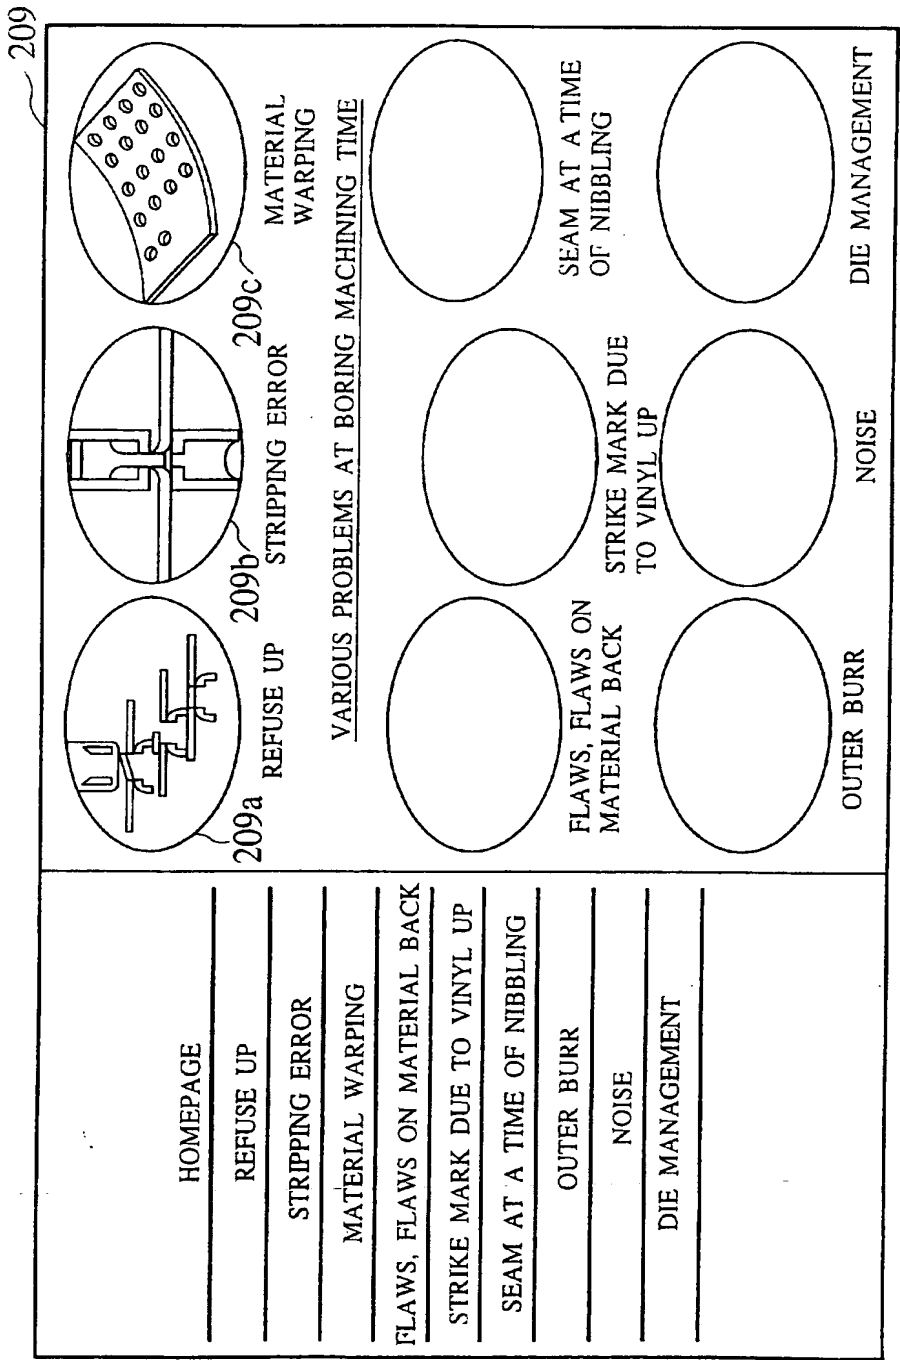


FIG.6

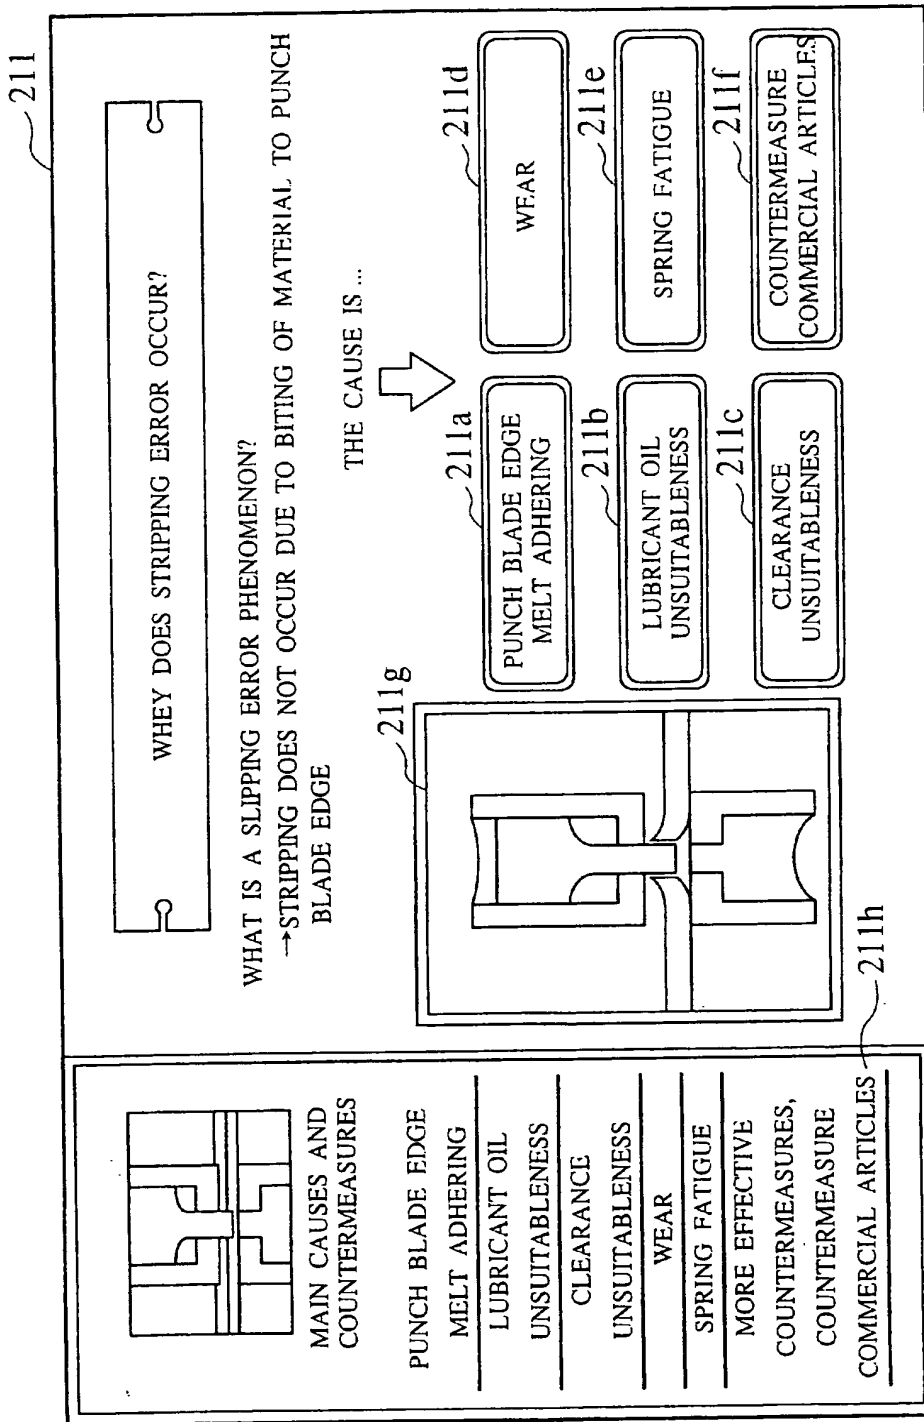


7/43

FIG.7

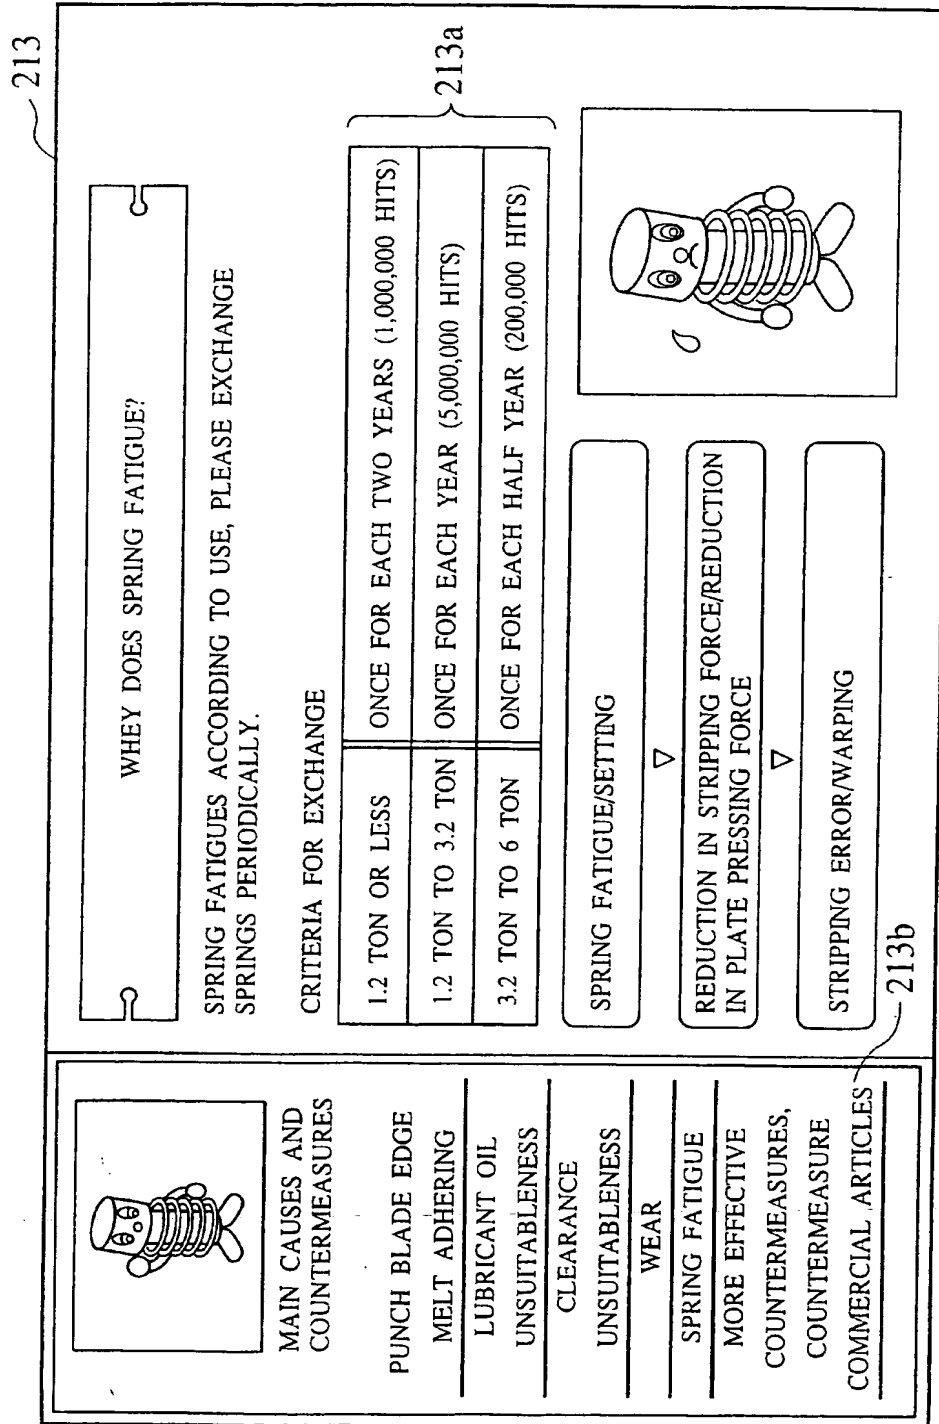

8/43


FIG.8

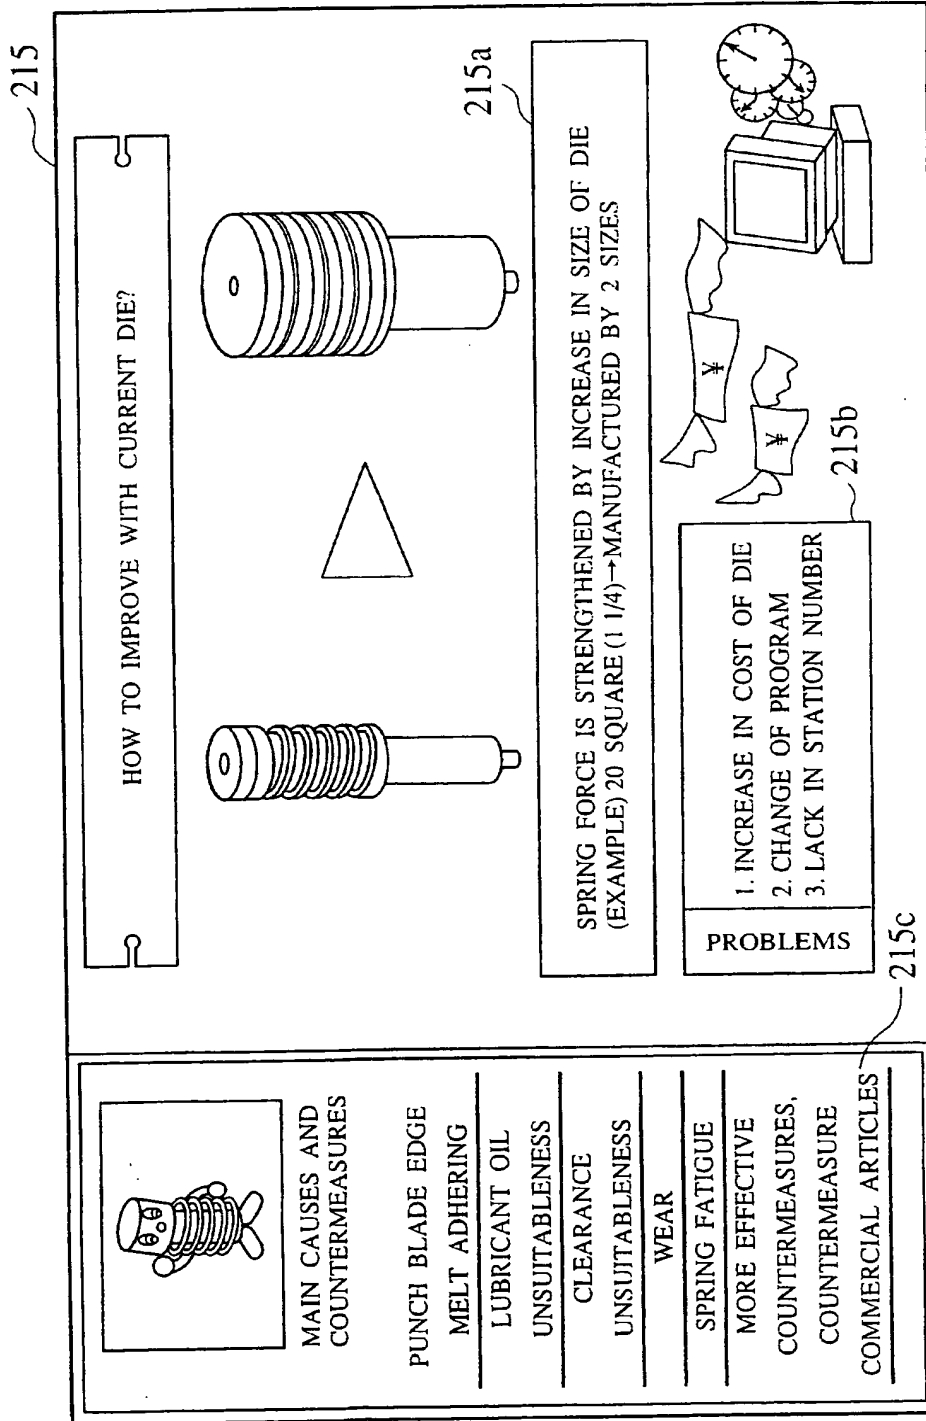



9/43

FIG.9

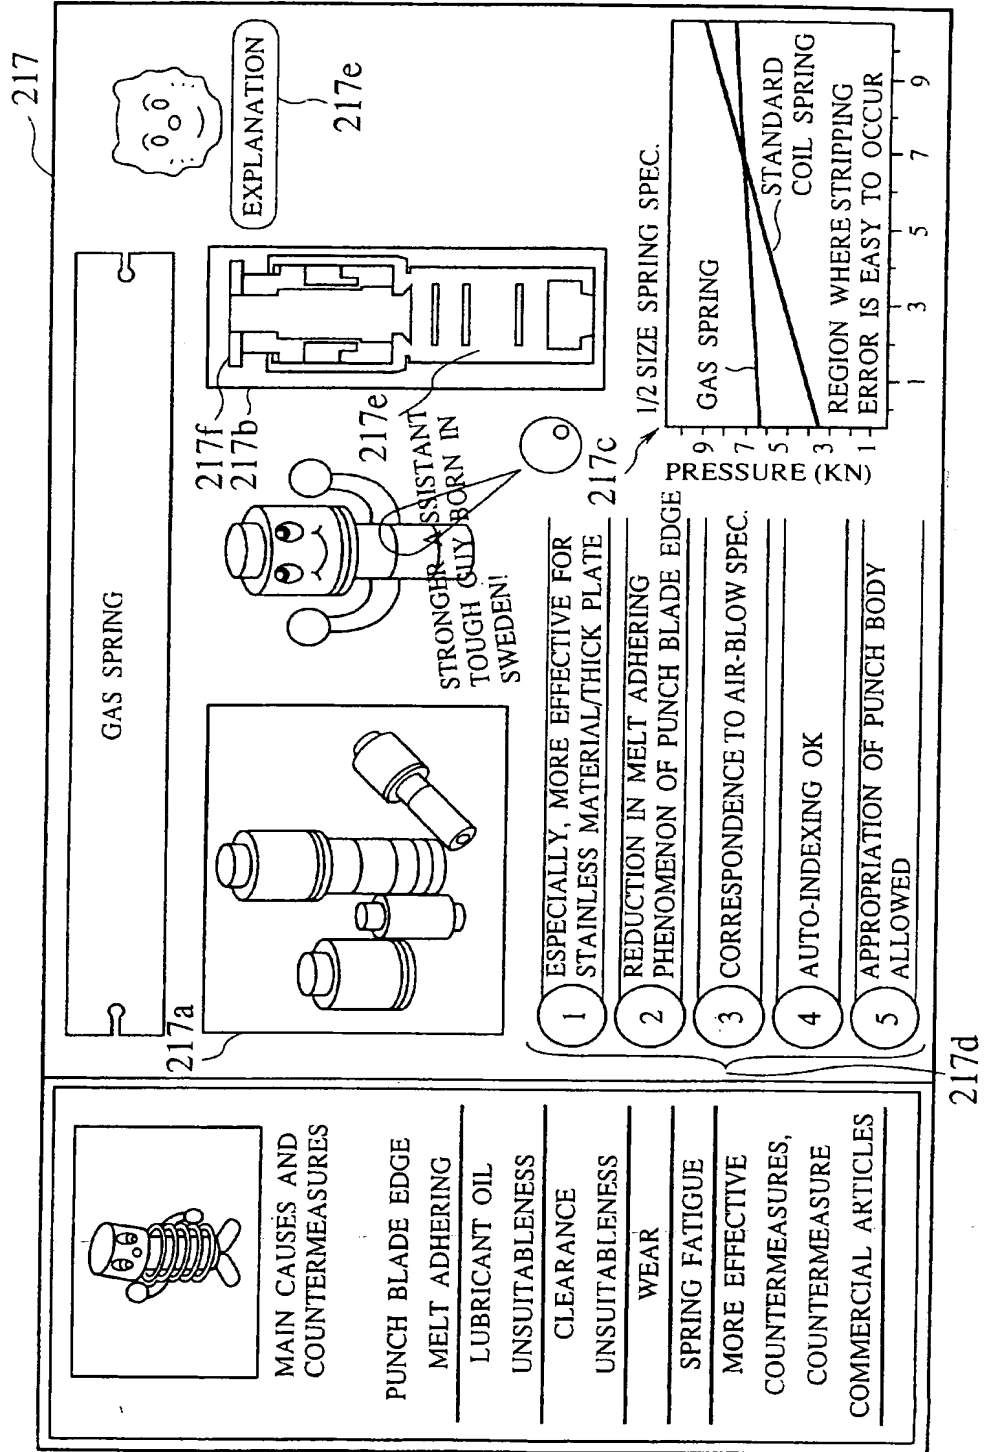

219


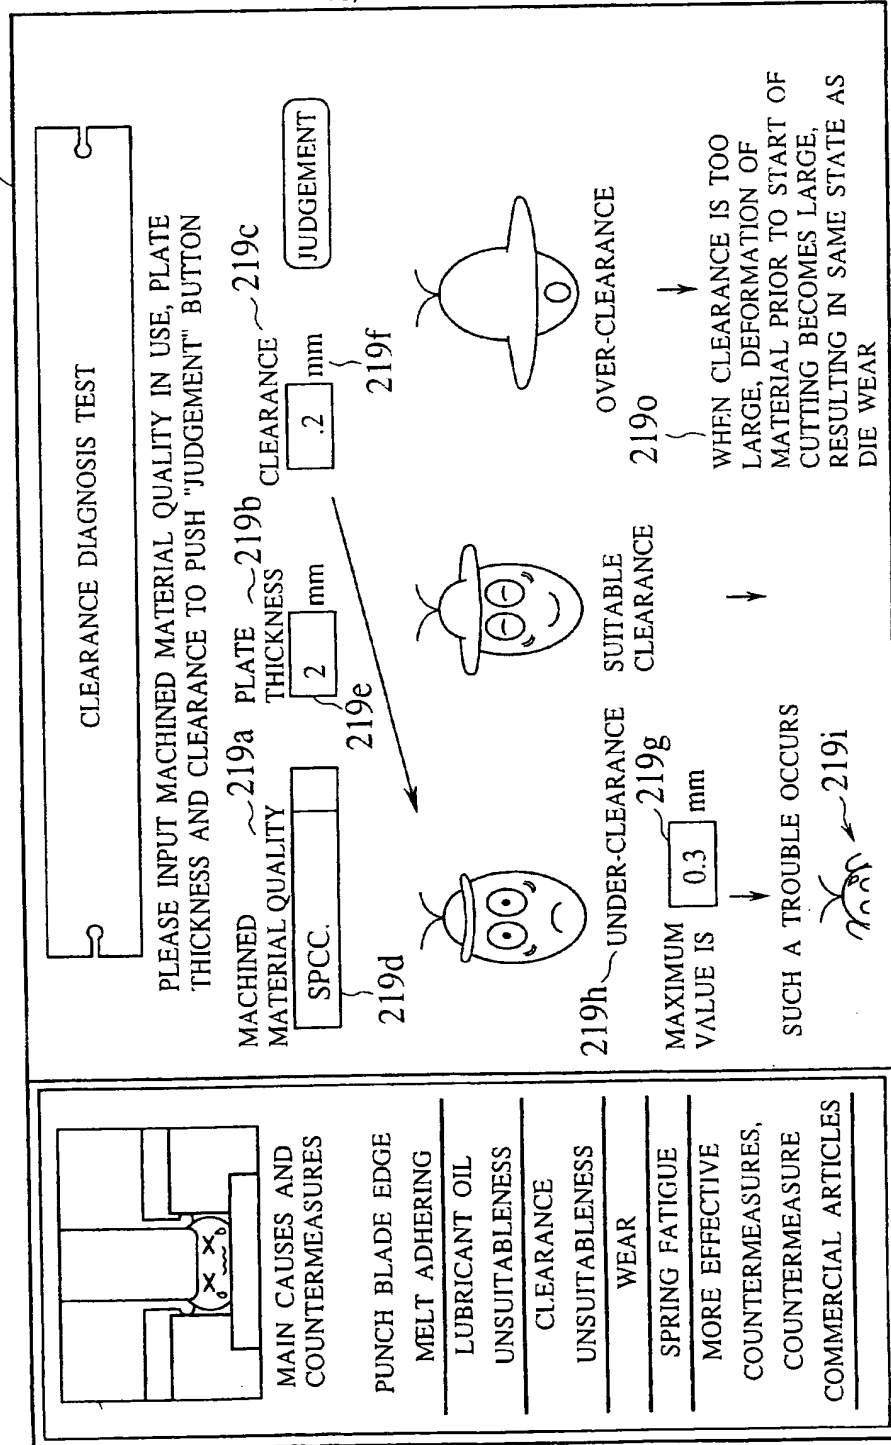


FIG.11

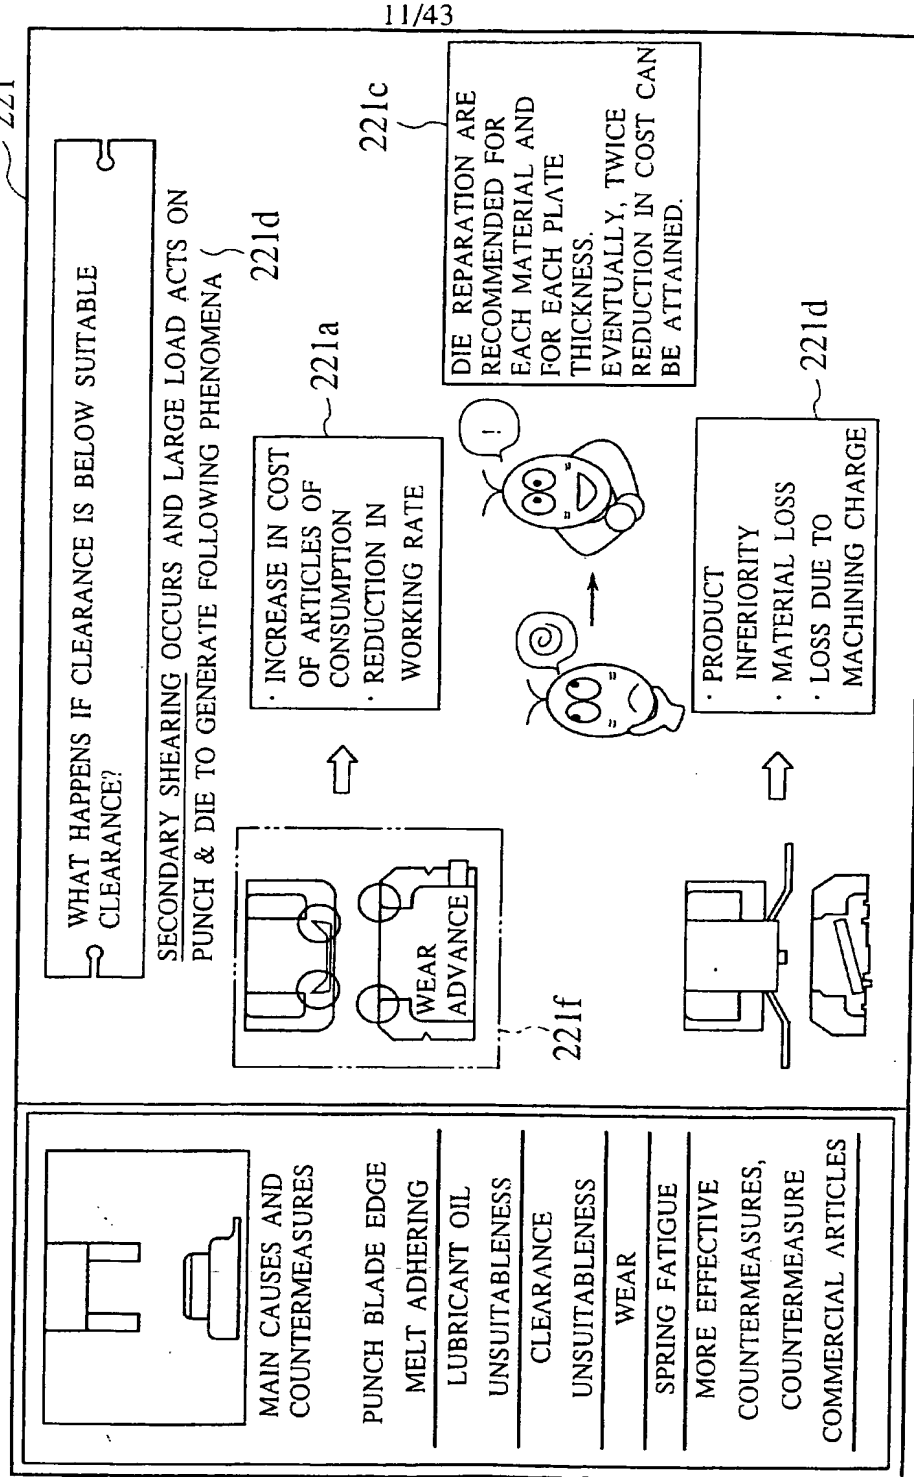

223


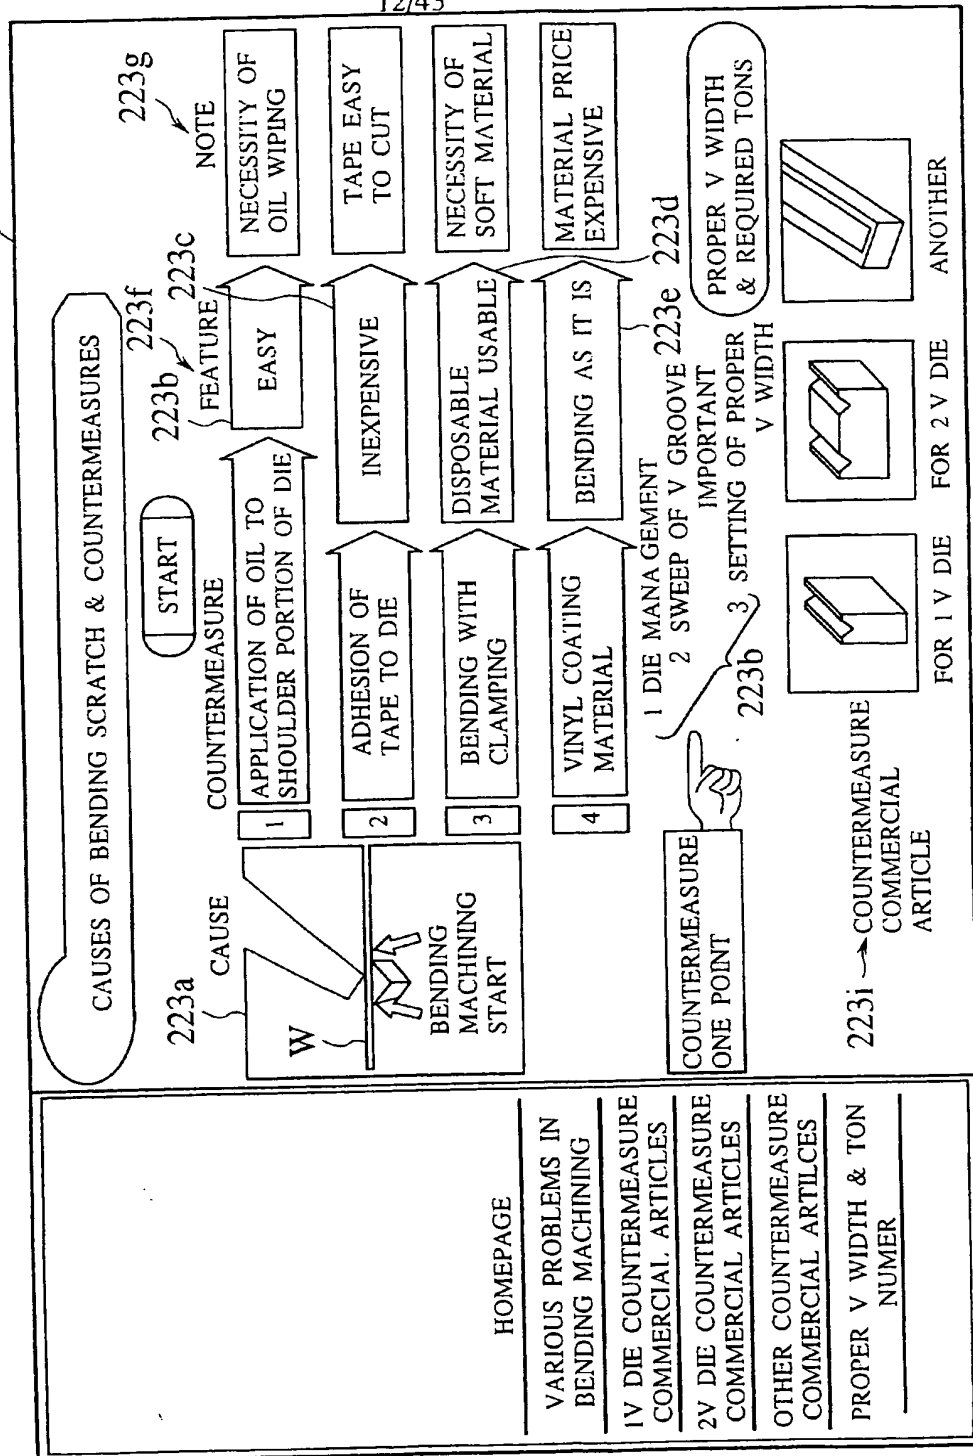


FIG.13

225

13/43

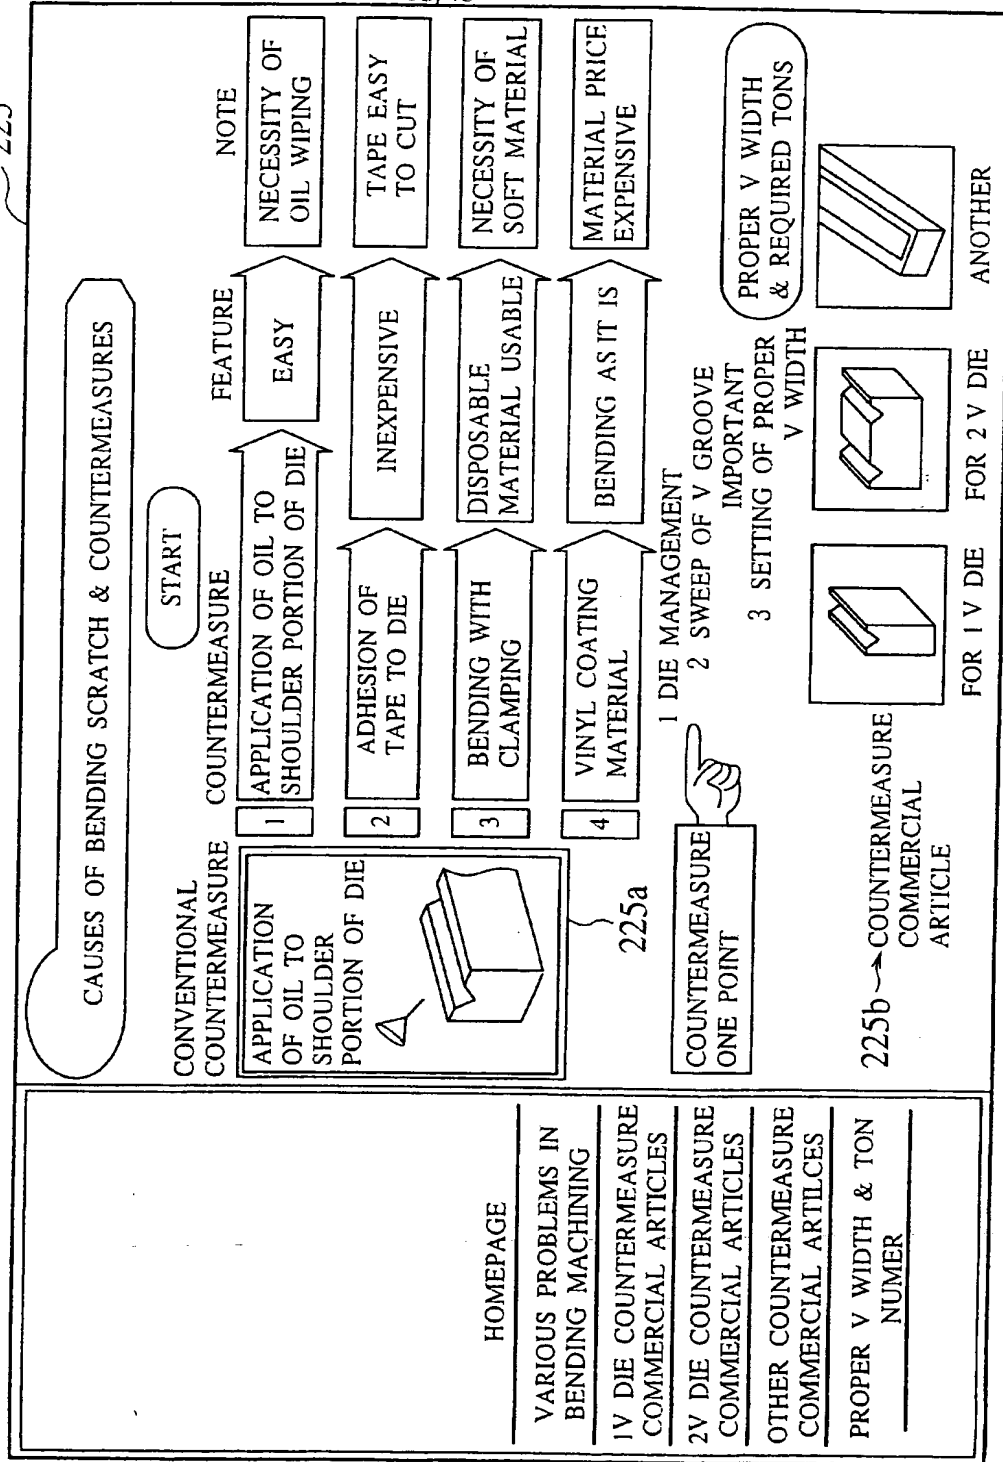

14/43


FIG.14

IV DIE COUNTERMEASURE COMMERCIAL ARTICLE


COMMERCIAL ARTICLE NAME : SELATIC DIE

FEATURE : LIGHT & INEXPENSIVE


PROPER MATERIAL QUALITY : STAINLESS STEEL, IRON, BONDERIZING THIN PLATE



SELATIC DIE



HARD PLATING



URETHANE SHEET

ACCORDING TO SELECTION OF PICTURE, EXPLANATION IS DISPLAYED ON BLUE FRAME

HOME PAGE

VARIOUS PROBLEMS IN BENDING MACHINING

IV DIE COUNTERMEASURE COMMERCIAL ARTICLES

2V DIE COUNTERMEASURE COMMERCIAL ARTICLES

OTHER COUNTERMEASURE COMMERCIAL ARTICLES

PROPER V WIDTH & TON NUMBER

227b

227a

15/43

FIG.15

229


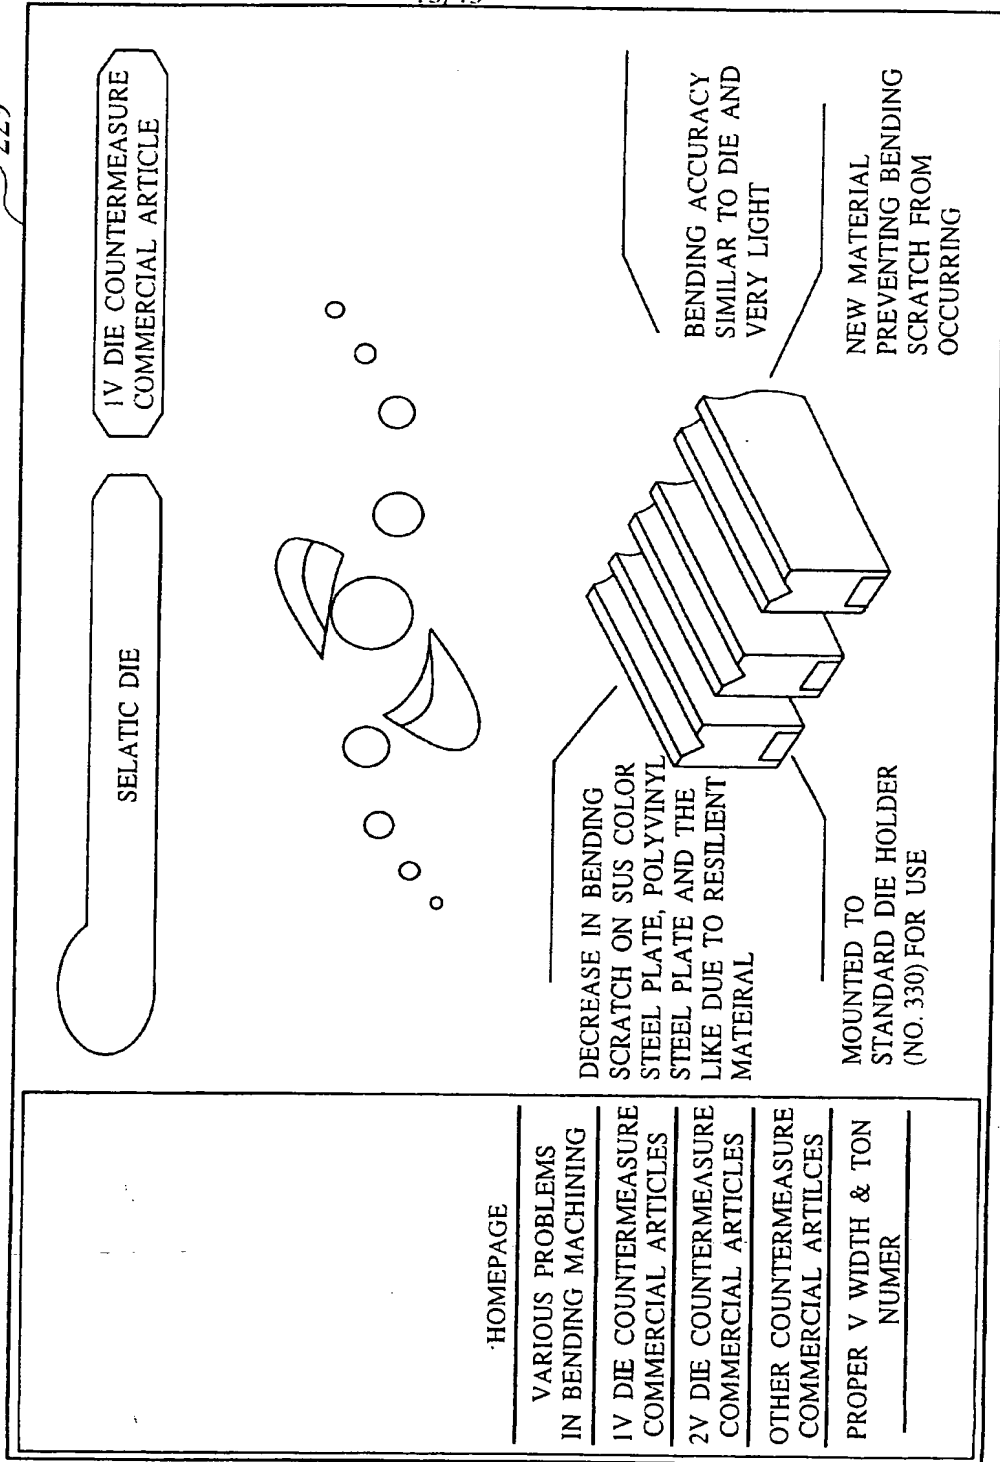



FIG. 16



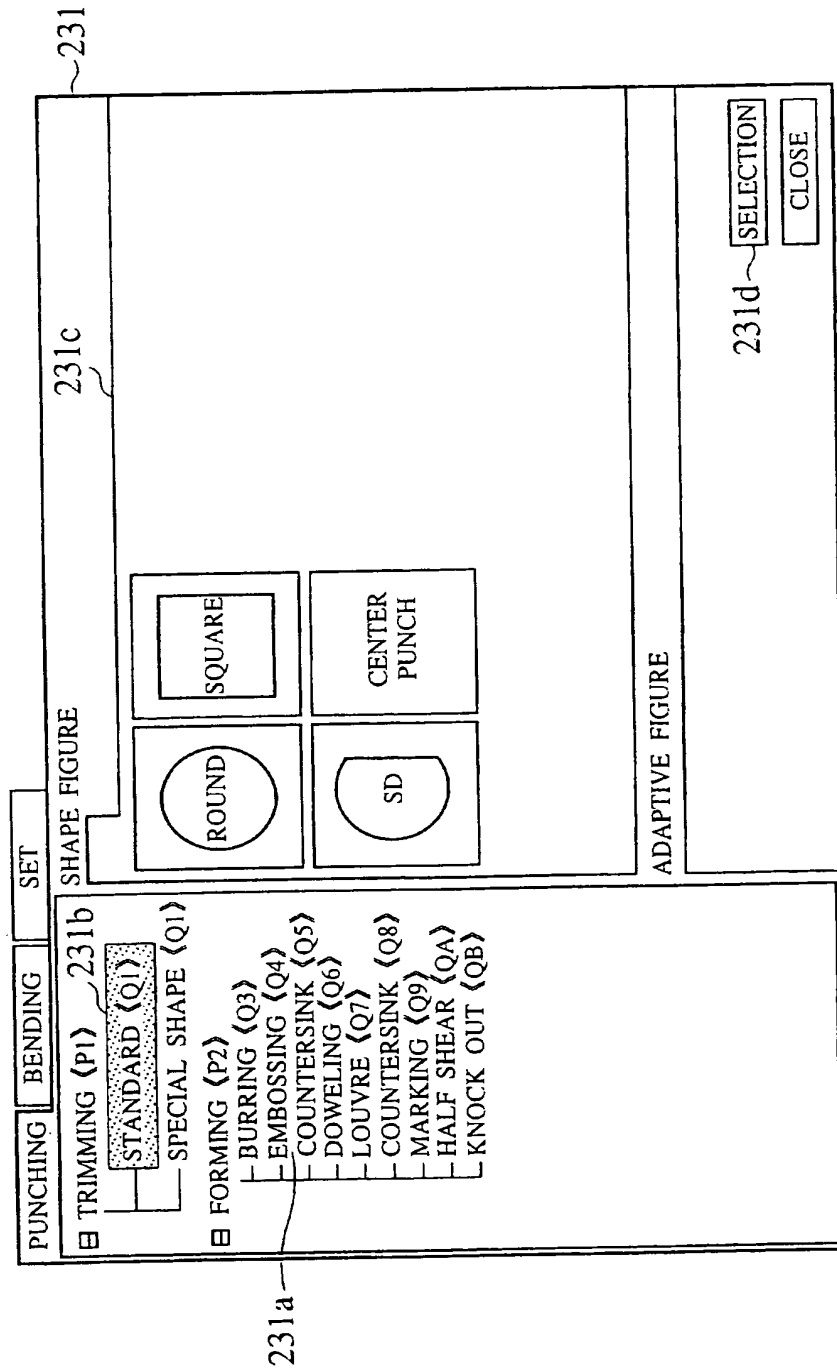

17/43

FIG.17

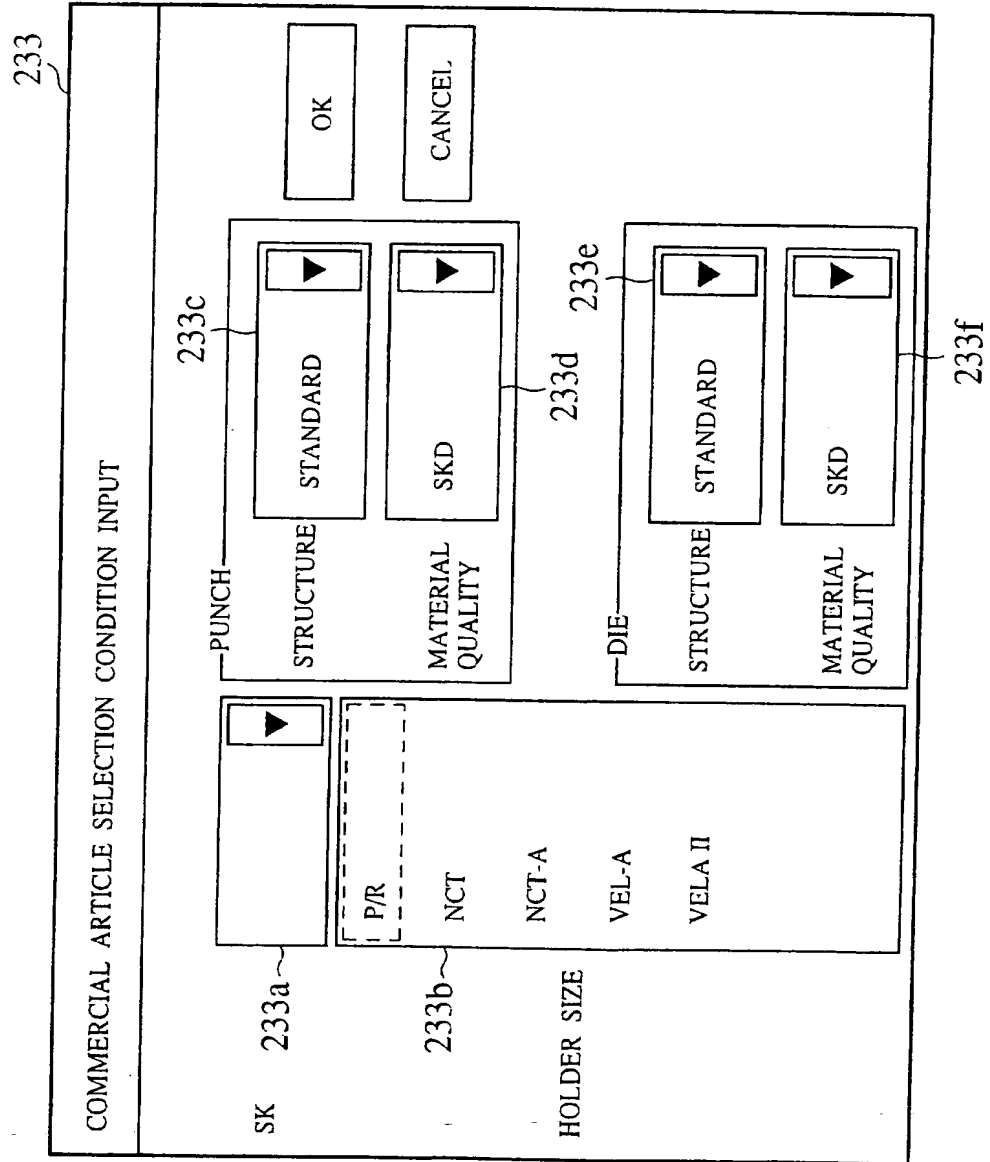

18/43

FIG.18

233

COMMERCIAL ARTICLE SELECTION CONDITION INPUT

SK 233a NCT

233b HOLDER SIZE 1 1/4"

PUNCH

STRUCTURE STANDARD

MATERIAL QUALITY SKD

DIE

STRUCTURE STANDARD

MATERIAL QUALITY SKD

OK

CANCEL

19/43

FIG.19

COMMERCIAL ARTICLE SELECTION CONDITION INPUT

SK

NCT

1 1/4"

HOLDER SIZE

PUNCH

STRUCTURE

STANDARD

MATERIAL QUALITY

SKD

DIE

STRUCTURE

STANDARD

MATERIAL QUALITY

SKD

OK

CANCEL

FIG.20

235

PARTS LIST

1/1

11/4  
AIR BLOW

12.71~30.0φ

235a

SPEC.

DETAILED FIGURE

No.	COMMERCIAL ARTICLE NAME	UNIT PRICE	QUANTITY
01	SET ASSY	XX,XXX	
02	PUNCH ASSY	XX,XXX	
03	PUNCH BODY	XX,XXX	
04	DIE	X,XXX	
05	PUNCH GUIDE	XX,XXX	
06	PUNCH HEAD	X,XXX	

SIZE INPUT

A SIZE

B SIZE

CLEARANCE

DEDICATED KEY

CORNER R

SPECIAL  
MENTION

SELECTION

CLOSE

235b

FIG.21

**COMMERCIAL ARTICLE SELECTION**

PUNCHING
BENDING
SET

☐ TRIMMING {P1} 237b

☐ STANDARD {Q1}

☐ SPECIAL SHAPE {Q2}

☐ FORMING {P2}

- BURRING {Q3}
- EMBOSSING {Q4}
- COUNTERSINK {Q5}
- DOWELING {Q6}
- LOUVRE {Q7}
- COUNTERSINK {Q8}
- MARKING {Q9}
- HALF SHEAR {QA}
- KNOCK OUT {QB}

**SHAPE FIGURE**

IIIIIIIVVVIVIIVIII

--	--	--	--	--	--	--	--

237c

**ADAPTIVE FIGURE**

237d

SELECTION

CLOSE

237a

FIG.22

COMMERCIAL ARTICLE SELECTION
NON-PATTERN

**PUNCHING** **BENDING** **SET**

**SHAPE FIGURE**

IIIIIIIVVVIVIIVIII

**TRIMMING <P1>**

- ☐ STANDARD <Q1>
- ☐ SPECIAL SHAPE <Q2>

**FORMING <P2>**

- ☐ BURRING <Q3>
- ☐ EMBOSSING <Q4>
- ☐ COUNTERSINK <Q5>
- ☐ DOWELING <Q6>
- ☐ LOUVRE <Q7>
- ☐ COUNTERSINK <Q8>
- ☐ MARKING <Q9>
- ☐ HALF SHEAR <QA>
- ☐ KNOCK OUT <QB>

--	--	--	--	--	--	--	--

239b

**ADAPTIVE FIGURE**

SELECTION

CLOSE

239a

23/43

FIG.23

241b

MACHINING POSSIBILITY 241a

SIZE INPUT PATTERN 1/8 < > P102-02

241c

ITEM	VALUE
A	10
B	0
K	0
R	0
S	0
KY	270

241d

MACHINED MATERIAL

PLATE THICKNESS

MATERIAL QUALITY SPCC

CLEARANCE

SK NCT 241e

HOLDER SIZE 1/2" 241f

PUNCH STRUCTURE STANDARD 241g

MATERIAL QUALITY SKD 241h

DIE STRUCTURE STANDARD 241i

MATERIAL QUALITY SKD 241j

TOTAL SHOTS

241k MACHINING POSSIBILITY

241l

FIGURE SIZE

ENLARGEMENT

REDUCTION

FIGURE POSITION

UP DOWN

CENTER

LEFT RIGHT

241m

FIGURE PRINT

241n

PRINT

NSDOCID: <CA 2337467A1\_L>

FIG.24

243b

MACHINING POSSIBILITY / 243a

SIZE INPUT PATTERN 3/8 < > P102-02

ITEM	VALUE	SIZE
B	0	
C	0	
L	0	
R	0	
S	0	
KY	270	

243d

MACHINED MATERIAL

PLATE THICKNESS

MATERIAL QUALITY

CLEARANCE

243e

SK

HOLDER SIZE 

243f

PUNCH STRUCTURE

243g

MATERIAL QUALITY

243h

DIE STRUCTURE

243i

MATERIAL QUALITY

243j

TOTAL SHOTS

243k

MACHINING POSSIBILITY

FIGURE SIZE

FIGURE POSITION

FIGURE PRINT

24/43



25/43

FIG.25

245a

MACHINING POSSIBILITY

SIZE INPUT PATTERN 3/8 < > P102-02

245

245e

ITEM	VALUE
B	15
C	15
L	75
R	1
S	1
KY	180

245d

SK NCT

HOLDER SIZE 2"

PUNCH STRUCTURE STANDARD

245f MATERIAL QUALITY SKD

DIE STRUCTURE STANDARD

MATERIAL QUALITY SKD

TOTAL SHOTS 1

245g

245b

MACHINING POSSIBILITY

FIGURE SIZE

ENLARGEMENT

REDUCTION

FIGURE POSITION

UP

CENTER

DOWN

LEFT

RIGHT

FIGURE PRINT

PRINT

\*CAPABLE OF MACHINING

245c

26/43

FIG.26

**PARTS LIST**

1/1

**2" SPECIAL SHAPE**

No.	COMMERCIAL ARTICLE NAME	UNIT PRICE	QUANTITY
01	SET ASSY	XX.XXX	
02	PUNCH ASSY	XX.XXX	
03	PUNCH BODY	XX.XXX	
04	DIE	XX.XXX	
05	STRIPPER PLATE	X.XXX	

SPECIAL MENTION

SELECTION

CLOSE

247

247b

247c

247a

27/43

FIG.27

249a

249

COMMERCIAL ARTICLE SELECTION

PUNCHING BENDING SET

NON-PATTERN

SHAPE FIGURE 249c

249d

ADAPTIVE FIGURE ~249e

SELECTION

CLOSE

ONE TOUCH (B1)  
— SK=11- (C0)  
PUNCH HOLDER (C1)  
PUNCH (C2)  
— STANDARD PUNCH (D8)  
— THICK MATERIAL PUNCH (D9)  
— GOOSE NECK (H90) ~ 249b  
— GOOSE NECK G SERIES  
— FRONT RECESS, FR (DC)  
— FOR SASH (H70~100)  
— POINT PUNCH (H95)  
— ACUTE-ANGLED PUNCH (H67~  
— FLATENING PUNCH  
— ALP PUNCH (DH)  
— R PUNCH (D1)  
— HINGE PUNCH (D,  
— MIDDLE HAND PUNCH (H8  
— CLOSING PUNCH  
DIE (C3)  
— STEP BENDING/L-SHAPE BENDING (CJ)  
STANDARD (B2)  
— SK=10- (C7)  
PUNCH HOLDER (C8)  
PUNCH (C9)  
DIE (CA)  
MEASURING INSTRUMENT (CG)  
TOOL BOX (CH)  
— STEP BENDING/L-SHAPE BENDING (C1)  
SELECTION FROM WORKPIECE (B3)

453 155 H=90 88°

452 150 H=90 88°

462 151 H=90 90°

463 156 H=90 90°


045 050 H=105 88°

046 051 H=105 90°

047 052 H=120 88°

048 053 H=120 90°

251

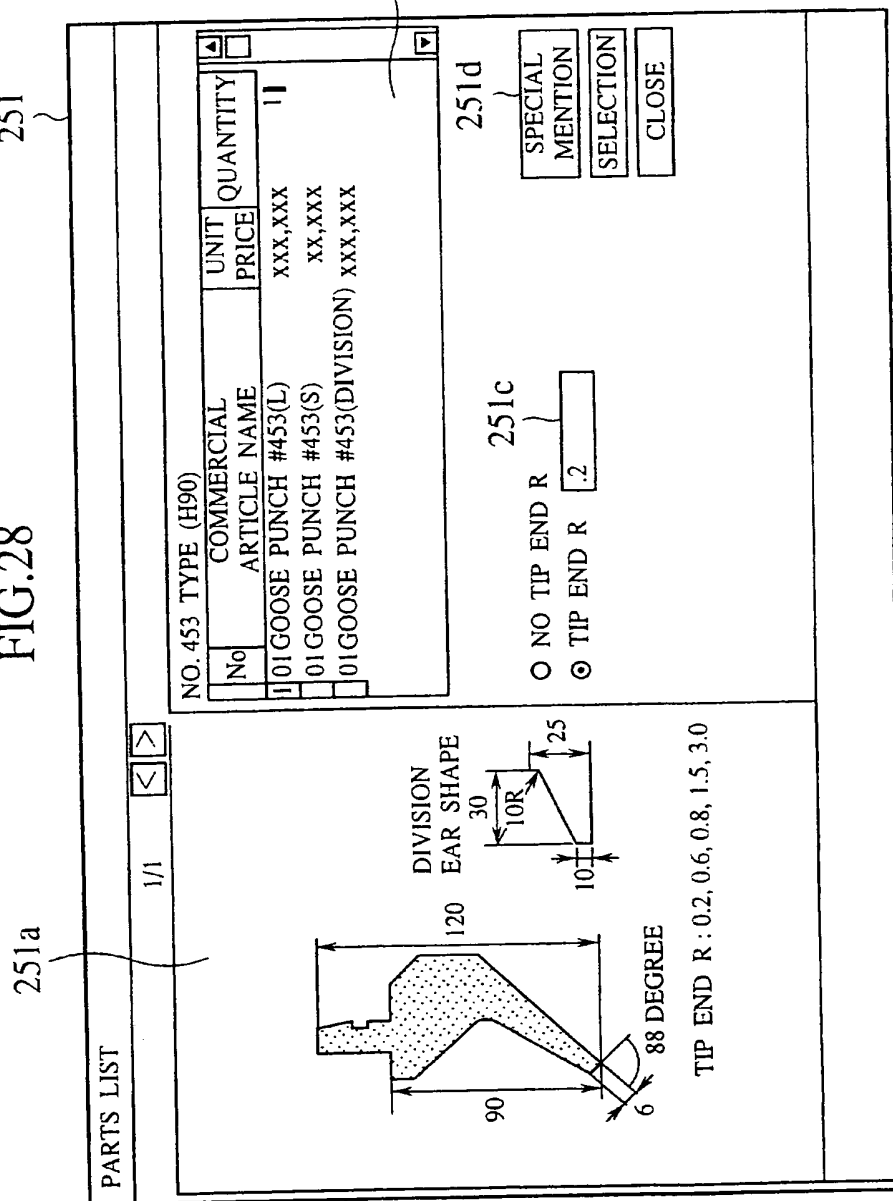

2327467A1 1 ~

FIG.29

29/43

253

SPECIAL MENTION ITEM SELECTION

253a

COMMERCIAL ARTICLE

253b

ONE TOUCH 88' GOOSE NECK 0.2R L

253c

APPLICABLE SPECIAL MENTION ITEM

253d

001 CUSTOMER SPECIFIED MARK

002 CHECK TABLE ATTACHED

023 CUT SIZE WITHOUT EAR

024 MATCHING OF CUSTOMER DIE HEIGHT

032 DESIGNATION OF RIGHT EAR LENGTH

033 DESIGNATION OF LEFT EAR LENGTH

253e

ADDITIONAL MACHINING

253f

TIP END ANGLE/R CHANGE

TIP END ANGLE CHANGE

TIP END R CHANGE

SPECIAL EAR

PRODUCT RECESS

APPLIED SPECIAL MENTION ITEM

253g

OK

CLOSE

FIG.30

255

**MACHINING POSSIBILITY**

TIP END ANGLE CHANGE ~ 255b

ITEM	VALUE
K	80
R	0.2

255c

255d

255e

255f

MACHINED MATERIAL

PLATE THICKNESS

V WIDTH

V WIDTH

MATERIAL QUALITY

SPHC

255g

255h

MACHINING POSSIBILITY

255i

SELECTION

CANCEL

TOTAL SHOTS

1

255j

GUIDANCE: RESISTING PRESSURE IS 45 TON/M AND WORKING REQUIRING PRESSURE IS 52 TON/M  
(CALCULATION AS V WIDTH = 48 MM)

WARNING: RESISTING PRESSURE INSUFFICIENT ~ 255k

CA 02337467 2001-01-15

FIG.31

257

257a

MACHINING POSSIBILITY

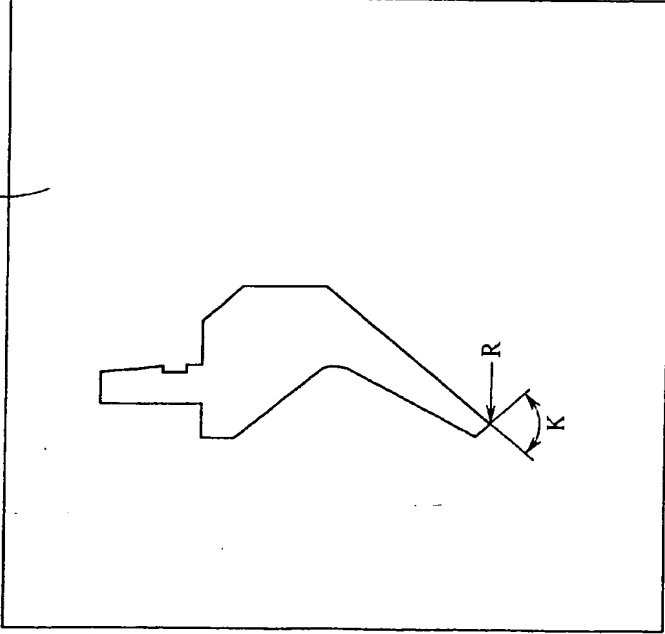


Diagram illustrating a mechanical part with a fillet of radius  $R$  and a chamfer of angle  $K$ .

TIP END ANGLE CHANGE ~ 257b

ITEM	VALUE
K	30
R	0.2

257c  
257d  
257e

257f

MACHINED MATERIAL V WIDTH  
PLATE THICKNESS 1 V WIDTH

MATERIAL QUALITY SPIIC 257g

TOTAL SHOTS 1

257h MACHINING POSSIBILITY CANCEL

ERROR : PLEASE INPUT A VALUE IN RANGE OF  $70 \leq K \leq 90$  INTO K SIZE ~ 257j

32/43

FIG.32

259

ESTIMATE PARENT NO. A700000		[DELIVERY] (LIMITED COMPANY) A WORKS/ [CONTRACT] (LIMITED COMPANY) A WORKS		ITEM FOR ORDER RECEPTION	
ESTIMATE		ESTIMATE DETAILS		INPUT 10	
DISCOUNT RATE		EXCESS APPLICATION		CONFIRMATION	
APPLICATION		SIMULTANEOUS		FIGURE REQUIRED?	
FIX		TRIAL PUNCHING		STRIP AMOUNT DISPLAY?	
259b		259a		259m	
Seq	SK	Cal-No.	QUANTITY	SHAPE	COMMERCIAL ARTICLE NAME
1	11	453021	1	000	ONE TOUCH 88° GOOSE NECK
2	11	45302E	1	000	No.453 TYPE OF ANGLE, R ADDITIONAL MACHINING
259d		259e		259n	
259f		259g		259h	
259i		259j		259k	
TOTAL AMOUNT		XXX,XXX		DISCOUNT AMOUNT	
XX,XXX		ESTIMATE AMOUNT		XXX,XXX	
259f		259g		259h	
259i		259j		259k	
259l		259m		259n	
259o		259p		259q	
259r		259s		259t	
259u		259v		259w	
259x		259y		259z	
259aa		259ab		259ac	
259ad		259ae		259af	
259ag		259ah		259ai	
259aj		259ak		259al	
259am		259an		259ao	
259ap		259aq		259ar	
259as		259at		259au	
259av		259aw		259ax	
259ay		259az		259ba	
259bb		259bc		259bd	
259be		259bf		259bg	
259bh		259bi		259bj	
259bk		259bl		259bm	
259bn		259bo		259bp	
259bq		259br		259bs	
259bt		259bu		259bv	
259bw		259bx		259by	
259bz		259ca		259cb	
259cc		259cd		259ce	
259cf		259cg		259ch	
259ci		259cj		259ck	
259cl		259cm		259cn	
259co		259cp		259cq	
259cr		259cs		259ct	
259cu		259cv		259cw	
259cx		259cy		259cz	
259da		259db		259dc	
259dd		259de		259df	
259dg		259dh		259di	
259dj		259dk		259dl	
259dm		259dn		259do	
259dp		259dq		259dr	
259ds		259dt		259du	
259dv		259dw		259dx	
259dy		259dz		259ea	
259eb		259ec		259ed	
259ee		259ef		259eg	
259eh		259ei		259ej	
259ek		259el		259em	
259en		259eo		259ep	
259eq		259er		259es	
259et		259eu		259ev	
259ew		259ex		259ey	
259ez		259fa		259fb	
259fc		259fd		259fe	
259ff		259fg		259fh	
259fi		259fj		259fk	
259fl		259fm		259fn	
259fo		259fp		259fq	
259fr		259fs		259ft	
259fu		259fv		259fw	
259fx		259fy		259fz	
259ga		259gb		259gc	
259gd		259ge		259gf	
259gg		259gh		259gi	
259gj		259gk		259gl	
259gm		259gn		259go	
259gp		259gq		259gr	
259gs		259gt		259gu	
259gv		259gw		259gx	
259gy		259gz		259ha	
259hb		259hc		259hd	
259he		259hf		259hg	
259hi		259hj		259hk	
259hl		259hm		259hn	
259ho		259hp		259hq	
259hr		259hs		259ht	
259hu		259hv		259hw	
259hx		259hy		259hz	
259ia		259ib		259ic	
259id		259ie		259if	
259ig		259ih		259ii	
259ij		259ik		259il	
259im		259in		259io	
259ip		259iq		259ir	
259is		259it		259iu	
259iv		259iw		259ix	
259iy		259iz		259ja	
259jb		259jc		259jd	
259je		259jf		259jg	
259jh		259ji		259jj	
259jk		259jl		259jm	
259jn		259jo		259jp	
259jq		259jr		259js	
259jt		259ju		259jv	
259jw		259jx		259jy	
259jz		259ka		259kb	
259kc		259kd		259ke	
259kf		259kg		259kh	
259ki		259kj		259kk	
259kl		259km		259kn	
259ko		259kp		259kq	
259kr		259ks		259kt	
259ku		259kv		259kw	
259kx		259ky		259kz	
259la		259lb		259lc	
259ld		259le		259lf	
259lg		259lh		259li	
259lj		259lk		259ll	
259lm		259ln		259lo	
259lp		259lq		259lr	
259ls		259lt		259lu	
259lv		259lw		259lx	
259ly		259lz		259ma	
259mb		259mc		259md	
259me		259mf		259mg	
259mh		259mi		259mj	
259mk		259ml		259mn	
259mo		259mp		259mq	
259mr		259ms		259mt	
259mu		259mv		259mw	
259mx		259my		259mz	
259na		259nb		259nc	
259nd		259ne		259nf	
259ng		259nh		259ni	
259nj		259nk		259nl	
259nm		259no		259np	
259nq		259nr		259ns	
259nt		259nu		259nv	
259nw		259nx		259ny	
259nz		259oa		259ob	
259oc		259od		259oe	
259of		259og		259oh	
259oi		259oj		259ok	
259ol		259om		259on	
259oo		259op		259oq	
259or		259os		259ot	
259ou		259ov		259ow	
259ox		259oy		259oz	
259pa		259pb		259pc	
259pd		259pe		259pf	
259pg		259ph		259pi	
259pj		259pk		259pl	
259pm		259pn		259po	
259pp		259pq		259pr	
259ps		259pt		259pu	
259pv		259pw		259px	
259py		259pz		259qa	
259qb		259qc		259qd	
259qe		259qf		259qg	
259qh		259qi		259qj	
259qk		259ql		259qm	
259qn		259qo		259qp	
259qq		259qr		259qs	
259qt		259qu		259qv	
259qw		259qx		259qy	
259qz		259ra		259rb	
259rc		259rd		259re	
259rf		259rg		259rh	
259ri		259rj		259rk	
259rl		259rm		259rn	
259ro		259rp		259rq	
259rr		259rs		259rt	
259ru		259rv		259rw	
259rx		259ry		259rz	
259sa		259sb		259sc	
259sd		259se		259sf	
259sg		259sh		259si	
259sj		259sk		259sl	
259sm		259sn		259so	
259sp		259sq		259sr	
259ss		259st		259su	
259sv		259sw		259sx	
259sy		259sz		259ta	
259tb		259tc		259td	
259te		259tf		259tg	
259th		259ti		259tj	
259tk		259tl		259tm	
259tn		259to		259tp	
259tq		259tr		259ts	
259tt		259tu		259tv	
259tw		259tx		259ty	
259tz		259ua		259ub	
259uc		259ud		259ue	
259uf		259ug		259uh	
259ui		259uj		259uk	
259ul		259um		259un	
259uo		259up		259uq	
259ur		259us		259ut	
259uu		259uv		259uw	
259ux		259uy		259uz	
259va		259vb		259vc	
259vd		259ve		259vf	
259vg		259vh		259vi	
259vj		259vk		259vl	
259vm		259vn		259vo	
259vp		259vq		259vr	
259vs		259vt		259vu	
259vv		259vw		259vx	
259vy		259vz		259wa	
259wb		259wc		259wd	
259we		259wf		259wg	
259wh		259wi		259wj	
259wk		259wl		259wm	
259wn		259wo		259wp	
259wq		259wr		259ws	
259wt		259wu		259wv	
259ww		259wx		259wy	
259wz		259xa		259xb	
259xc		259xd		259xe	
259xf		259xg		259xh	
259xi		259xj		259xk	
259xl		259xm		259xn	
259xo		259xp		259xq	
259xr		259xs		259xt	
259xu		259xv		259xw	
259xx		259xy		259xz	
259ya		259yb		259yc	
259yd		259ye		259yf	
259yg		259yh		259yi	
259yj		259yk		259yl	
259ym		259yn		259yo	
259yp		259yq		259yr	
259ys		259yt		259yu	
259yv		259yw		259yx	
259yy		259yz		259za	
259zb		259zc		259zd	
259ze		259zf		259zg	
259zh		259zi		259zj	
259zk		259zl		259zm	
259zn		259zo		259zp	
259zq		259zr		259zs	
259zt		259zu		259zv	
259zw		259zx		259zy	
259zz		259aa		259ab	
259ac		259ad		259ae	
259af		259ag		259ah	
259ai		259aj		259ak	
259al		259am		259an	
259ao		259ap		259aq	
259ar		259as		259at	
259au		259av		259aw	
259ax		259ay		259az	
259ba		259bb		259bc	
259bd		259be		259bf	
259bg		259bh		259bi	
259bj		259bk		259bl	
259bm		259bn		259bo	
259bp		259bq		259br	
259bs		259bt		259bu	
259bv		259bw		259bx	
259by					



FIG.33

33/43

261

ESTIMATE PARENT NO.

[DELIVERY] (LIMITED COMPANY) A WORKS/  
[CONTRACT] (LIMITED COMPANY) A WORKS

261a

ESTIMATE    ESTIMATE DETAILS

☐ EXCESS APPLICATION

☐ SIMULTANEOUS TRIAL PUNCHING

☐ MAIL RESPONSE FOR PREPARED HOLE SIZE?

☒ STRIP AMOUNT DISPLAY?

☐ BLANKET DELIVERY

☐ CONFIRMATION FIGURE REQUIRED?

Seq	SK	Car-No.	QUANTITY	SHAPE	COMMERCIAL ARTICLE NAME	A SIZE	B SIZE	CLEAR	CORNER R	DEDICATED KEY	ESTIMATE AMOUNT
1	10	004021	1	000	88° PUNCH 0.2RL	20	20	2			XX.XXX
2	11	322040	1	002	1 1/4" OH SHAPE	20	20	2			XXX.XXX

261b

TOTAL AMOUNT    XXX.XXX    DISCOUNT AMOUNT    XX.XXX    ESTIMATE AMOUNT    XXX.XXX

261e

COMMERCIAL ARTICLE NAME 88° PUNCH 0.2RL

UNIT PRICE    XX.XXX    PRICE    XX.XXX

REFERENCE    DELIVERABLE DAY    1998/06/30

DELIVERY TIME    1    261c

MARKING No.    CUSTOMER REQUEST DAY    / /

DISCOUNT RATE    10(%)    DISCOUNT AMOUNT    XX.XXX

SPECIAL MENTION ITEM

SEQ	MENTION ITEM	VALUE
1	261d	

261i ~ ☐ FAX

ITEM FOR ORDER RECEPTION

261f

CALCULATION

261g  
261h

34/43

## FIG.34

ESTIMATE ~ 263

JUNE 23, 1998

PAGE 1

No. A700000

LIMITED COMPANY A WORKS

REGARDING YOUR INQUERY OF NO.XXXXX DATED JUNE 23. WE ESTIMATE  
THIS CASE AS FOLLOWS, THEREFORE PLEASE LET US HAVE YOUR ORDER  
REGARDING THIS CASE.

263a

DELIVERY TIME AS FOLLOWS

263b

DELIVERY PLACE YOUR DESIGNATED PLACE

TEL  
FAX

263c

PAYMENT CONDITION AS USUAL

263d

DELIVERY CONDITION DELIVERY

263e

EFFECTIVE TERM OF ESTIMATE

--	--	--	--

263f


TOTAL AMOUNT ¥ 221,580-					
ITEM	ARTICLE NAME SPEC.	QUANTITY	UNIT PRICE	AMOUNT	DELIVERY TIME
A700045-001	ONE TOUCH 88° GOOSE NECK 0.2R L No.:453021	1	XXX,XXX	XXX,XXX	
A700045-002	ONE TOUCH No.453 TYPE OF ANGLE R ADDITIONAL MACHINIG (B4530KT)	1	XXX,XXX	XXX,XXX	
		1	TOTAL AMOUNT	XXX,XXX	
			YOUR DISCOUNT	XX,XXX	
			PROPOSED PRICE	XXX,XXX	
	- BLANK BELOW -				

263g 263h

263i

35/43

FIG.35

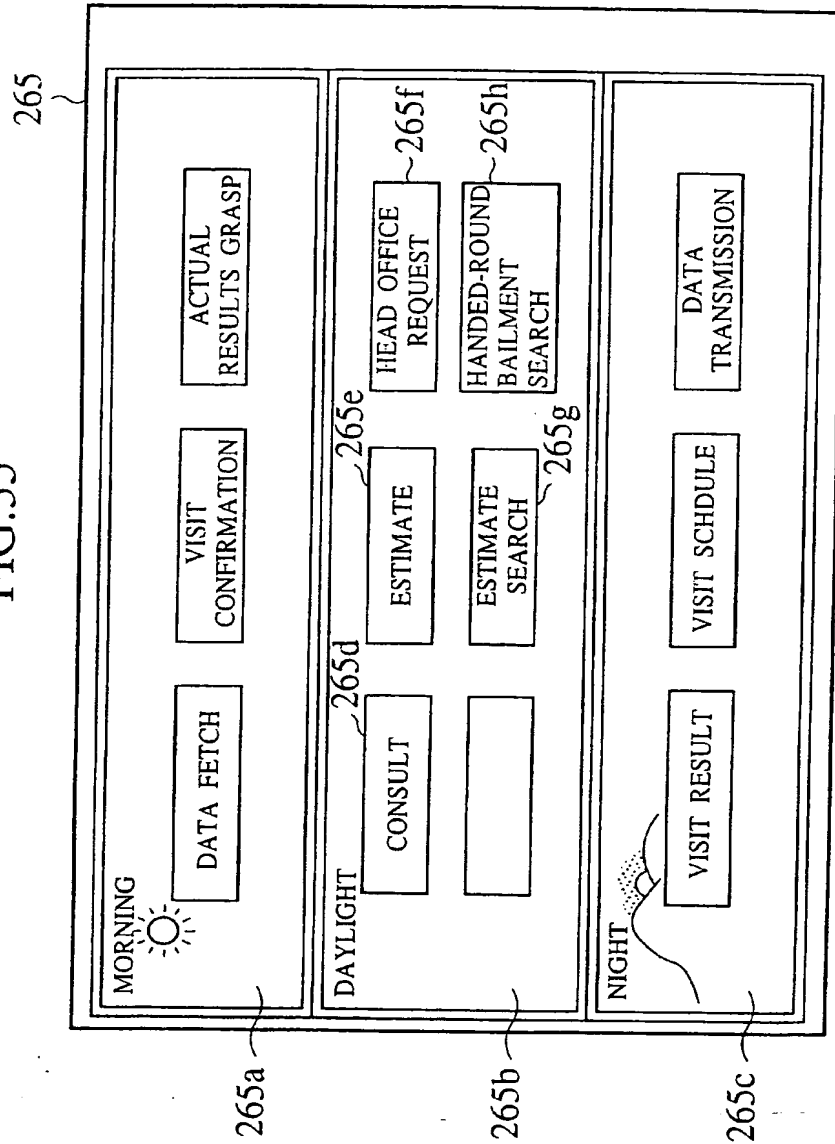

36/43

FIG.36 270

GR

ES

Se

CC

AR

UN

RE

DE

MA

COMMERCIAL ARTICLE SELECTION

PUNCHING

BENDING

SET

ONE TOUCH <B1>

-SK=11 - <C0>

PUNCH HOLDER <C1>

PUNCH <C2>

DIE <C3>

L-STEP BENDING/L-SHAPE BENDING <C1>

STANDARD <B2>

-SK=10 - <C7>

PUNCH HOLDER <C8>

PUNCH <C9>

DIE <CA>

MEASURING INSTRUMENT <CG>

TOOL BOX <CH>

L-STEP BENDING/L-SHAPE BENDING <C1>

SELECTION FROM WORKPIECE <B3>

IMAGE INDICATION

NON-PATTERN

SHAPE FIGURE 270c

SELECTION OF WORKPIECE SHAPE

270b

ADAPTIVE FIGURE

SELECTION

CLOSE

BENDING/F07/8BENDING/%data%pattern\F07.bmp

37/43

FIG.37

GR ES Se CO AR UN RE DE MA

272b

272d

272

PUNCHING BENDING SET INPUT SIZES NON-PATTERN

SHAPE FIGURE

ONE TOUCH (R1) RETURN BEND CHECK

O STANDARD O ONE TOUCH

[WORKPIECE SIZE]

...INPUT

PLATE THICKNESS mm

W SIZE L SIZE

(WIDTH)=(DEPTH)=

mm mm mm mm

mm mm mm mm

ADDITION AND DRAWING

[INPUT PATTERN]

CANCEL

[HOLDER TYPE] O Z I O Z II

[DIE] ...PLEASE SELECT 272e

No.004  
No.004 (FOR BR RECESS No.1)  
No.004 (FOR BR RECESS No.2)  
ALP (FOR BR RECESS No.3)  
No.117

CLEAR FIGURE

x1.0

RETURN TO MENU

DETAIL

ADDITIONAL MACHINIG & RESISTING PRESSURE CALCULATION

272a

272c

272c

L SIZE (DEPTH)

W SIZE (WIDTH)

FIG.38

274

GR ES Se CO AR UN RE DE MA

PUNCHING BENDING SET

SHAPE FIGURE

ONE TOUCH (RI) RETURN BEND CHECK

STANDARD ONE TOUCH

[WORKPIECE SIZE]

...INPUT

PLATE THICKNESS 1.2 mm

W SIZE L SIZE

(WIDTH)=(DEPTH)=

25 mm 50 mm mm

mm mm mm mm

[INPUT PATTERN]

ADDITION AND DRAWING

CANCEL

[HOLDER TYPE] O Z I O Z II

[DIE] ...PLEASE SELECT

No.004

No.004 (FOR BR RECESS No.1)

No.004 (FOR BR RECESS No.2)

ALP (FOR BR RECESS No.3)

No.117

274b

CLEAR FIGURE

×1.0

272d

274a

272a

272e [No.004]

67

NON-PATTERN

RETURN TO MENU

DETAIL

ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION

39/43

276

FIG.39

GR ES Se CO AR UN RE DE MA

PUNCHING BENDING SET DIE SELECTION NON-PATTERN

ONE TOUCH (R1) SHAPE FIGURE

O STANDARD @ ONE TOUCH

[WORKPIECE SIZE] ◆

...INPUT

PLATE THICKNESS 1.2 mm

W SIZE L SIZE

(WIDTH)=(DEPTH)=

25 mm 50 mm

mm mm mm mm

[ INPUT PATTERN ]

W=25.00 L=50.00 F=00 CANCEL

[ ADDITION AND DRAWING ]

[ HOLDER TYPE ] O Z I @ Z II 272d

[ DIE ] ...PLEASE SELECT

No.453

ALP (FOR BR RECESS No.4)

No.045

No.047

No.516

CLEAR FIGURE

×1.0

276a

272a

276b [No.453]

90

ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION

RETURN TO MENU

DETAIL

FIG.40

278

**PUNCHING BENDING SET**

**ADDITIONAL MACHINING JUDGEMENT**

**[WORKPIECE MATERIAL QUALITY SELECTION]**

TENSILE STRENGTH=28

SPCC 1.2t

**[DIE SELECTION]**

INWARDLY BENDING RADIUS  $\approx V/6$

O 1V DIE  $\odot$  2V DIE

V WIDTH 8

V ANGLE 88°

278c

124(8×12)

30310(8×12)

**[CALCULATION RESULT]**

BENDING TONS = BOTTOMING

PUNCH WARRANTY	50 ton/m
RESISTING PRESSURE	80 ton/m
DIE WARRANTY	
RESISTING PRESSURE	
BENDING TONS	12.0 ton/m
MINIMUM FLANGE LENGTH	5.5mm
PUNCH RESISTING PRESSURE	RESISTING PRESSURE OK
DIE RESISTING PRESSURE	RESISTING PRESSURE OK
DIE WARPING	0.02mm

RETURN

REFER TO AMOUNT

**NON-PATTERN**

276a

278b

272a

278a

278

X=-19.464 Y=49.598

[No.453]

×1.0

DETAIL

**ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION**



FIG.41 280

GR		ES		Se		CO		AR		UN		RE		DE		MA	
PUNCHING		BENDING		SET		NON-PATTERN											
ONE TOUCH / 2.1.1 REFER TO CATNO DECISION & PRICE																	
BLADE EDGE ANGLE O {88.} O 90° O OTHERS																	
LENGTH O 835mm(L) O 415mm(S) O DIVISION																	
TIP END R O 0.2R O 0.6R O 0.8R O 1.5R O 3.0R																	
DIE & CATNO GOOSE NECK PUNCH 6mm 453021																	
PRICE 280a DIE FEE XXX,XXX ADDITIONAL MACHINING FEE XX,XXX TOTAL XXX,XXX																	
DECISION																	
RETURN PRINT																	
280b 																	
[No.453] X=19.464 Y=49.598 ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION																	

42/43

282

FIG.42

GR ES
Se
CO AR UN RE DE MA

PUNCHING
BENDING
SET
UNSUITABLE DIE SELECTION
NON-PATTERN

ONE TOUCH (R1)
SHAPE FIGURE

☒ STANDARD    ☐ ONE TOUCH

[WORKPIECE SIZE]

...INPUT

PLATE THICKNESS  mm

W SIZE L SIZE

(WIDTH)=(DEPTH)=

mm  mm     mm     mm

mm     mm     mm     mm

[INPUT PATTERN]

CANCEL

[HOLDER TYPE]    ☐ Z I    ☐ Z II

[DIE] ...PLEASE SELECT

No.004

No.004 (FOR BR RECESS No.1)

No.004 (FOR BR RECESS No.2)

ALP (FOR BR RECESS No.3)

No.117

CLEAR FIGURE

ADDITION AND DRAWING

274a

282a

67

282b

Y=49.598

X=-19.464

[No.004]

X1.0

RETURN TO MENU

DETAIL

ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION

FIG.43

284

GR		ES		Se		CO		AR		UN		RE		DE		MA	
PUNCHING		BENDING		SET		NON-PATTERN											
ADDITIONAL MACHINING JUDGEMENT [WORKPIECE MATERIAL QUALITY SELECTION]																	
SPCC		1.2t															
[DIE SELECTION] INWARDLY BENDING RADIUS $\approx V/6$ O IV DIE $\odot$ 2V DIE																	
V WIDTH		8															
V ANGLE		88°															
124(8x12)		30310(8x12)															
[CALCULATION RESULT] BENDING TONS = BOTTOMING																	
PUNCH WARRANTY		RESISTING PRESSURE		ton/m													
DIE WARRANTY		RESISTING PRESSURE															
BENDING TONS		MINIMUM FLANGE LENGTH															
PUNCH RESISTING PRESSURE		DIE RESISTING PRESSURE															
DIE WARPING																	
NOTE: SHORTAGE OF THICKNESS OF UPPER PORTION OF PUNCH																	
RETURN																	
DISPLAY OF REASON FOR IMPOSSIBILITY 284a																	
X1.0		[No.004]		X=-19.464		Y=49.598											
ADDITIONAL MACHINING & RESISTING PRESSURE CALCULATION																	
DETAIL																	

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**